

# ROTTLER

## EM45 CNC MACHINING CENTER MACHINE MAINTENANCE AND PARTS MANUAL



# MANUAL SECTIONS

INTRODUCTION

MAINTENANCE

TROUBLESHOOTING

MACHINE PARTS

SDS

## ORDERING PROCEDURE

Contact your regional Rottler sales rep for assistance in ordering optional equipment, replacement parts, or tooling.

If you are unable to contact your regional Rottler sales rep, call the factory at (253)-872-7050 and ask to speak to the parts sales specialist.

Have the following information on hand to expedite the ordering process:

1. Your name, business name, and contact number
2. Customer number, or your billing address if you do not have a customer number
3. Shipping address if different from the billing address
4. Machine model and serial number
5. Part number and description of the item(s) to order
6. Preferred method of shipment

You may also contact us via e-mail with the above information. For customers within the U.S., send emails to [parts@rottermfg.com](mailto:parts@rottermfg.com), for customers outside of the U.S., use [intlparts@rottermfg.com](mailto:intlparts@rottermfg.com)

In some cases you may be requested to send a photo of the part you are ordering if it is a replacement part or does not appear in our database.

If you are unsure which part you need to order, contact our service department, and ask to speak to one of our service consultants. They will assist you in determining which part(s) you require.


**THERE IS A MINIMUM ORDER OF \$25.00**

# INTRODUCTION

## Contents

<b>Introduction</b> .....	<b>1-1</b>
<b>Description</b> .....	<b>1-2</b>
<b>Disclaimer</b> .....	<b>1-2</b>
<b>Limited Warranty</b> .....	<b>1-3</b>
<b>Online Documentation Access</b> .....	<b>1-4</b>

## Introduction

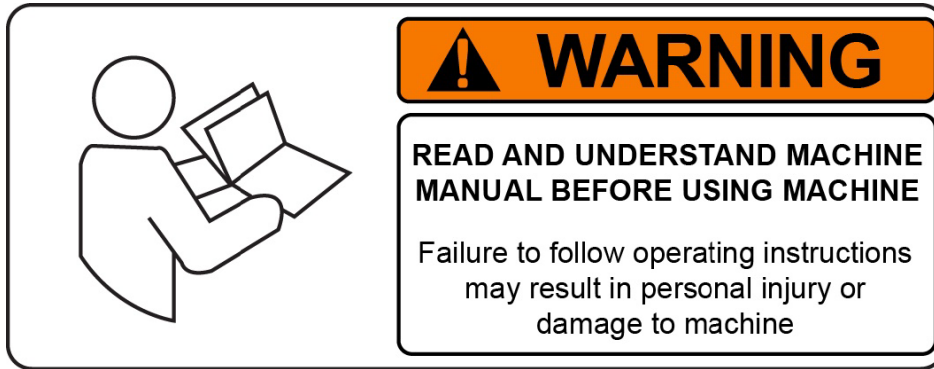

**READ THE SAFETY SECTION OF THE OPERATIONS MANUAL BEFORE INSTALLING THE MACHINE. THOROUGHLY UNDERSTAND ALL SAFETY ISSUES BEFORE OPERATING MACHINE.**

### **ATTENTION OWNER/BUSINESS MANAGER**

**To validate the warranty on your new Rottler machine, please be sure to sign and complete the “Installation Report” located in this manual.**

We suggest that the new user(s) of the EM45 read the “Control Definitions” section of the Operations Manual to understand how the machine operates.

The “Operating Instructions” section of the Operations Manual should be read in order to familiarize the user with the actual button pushing sequences required to carry out a job. These sections in the manual should be considered an introduction. As the operator(s) of the EM45 series machine gain experience with using the different functions of the machine, complicated setups and programs will make more sense.

The Maintenance and Parts Manual contains information on part number references and routine machine maintenance. The operator(s) should read and become familiar with these areas as well.

## Description

The model EM45 machine is a precision, single point boring, and high-speed surfacing unit. It can be equipped with tooling and accessories for surfacing and re-boring most small to medium gas and diesel engine blocks, both in-line and V-type.

EM45 machines can be easily tooled to machine a wide range of engines, including European and Asian engines. It can also be easily adapted to perform other boring and surfacing operations.

The machine is designed to maintain alignment of cylinder bores, cylinder heads, and deck surfaces to the pan rails and main bearing bore locations, as was done in the original factory machining. This overcomes the many inaccuracies and out-of-alignment problems associated with clamping portable boring bars to the cylinder head surface of blocks.

Convenient controls, fast block clamping, and precise 3-axis CNC positioning means considerable savings in floor-to-floor time and operator involvement.

Change over or resetting time required to set up V-type or In-line engines is minimized, making this machine highly suited to shops where engines cannot be run through in model lots.

All feeds and rapid travels are power operated and controlled from the control panel.

## Disclaimer

The EM45 Manual (henceforth to be referred to as the "Manual") is proprietary to Rottler Manufacturing LLC. ("Rottler Manufacturing") and no ownership rights are hereby transferred. No part of the Manual shall be used, reproduced, translated, converted, adapted, stored in a retrieval system, communicated or transmitted by any means, for any commercial purpose, including without limitation, sale, resale, license, rental or lease, without the prior express written consent of Rottler Manufacturing.

Rottler Manufacturing does not make any representations, warranties, or guarantees, express or implied, as to the accuracy or completeness of the Manual. Users must be aware that updates and amendments will be made from time to time to the Manual. It is the user's responsibility to determine whether there have been any such updates or amendments. Neither Rottler Manufacturing nor any of its directors, officers, employees, or agents shall not be liable in any manner whatsoever to any person for any loss, damage, injury, liability, cost, or expense of any nature, including without limitation incidental, special, direct or consequential damages arising out of or in connection with the use of the Manual.

Rottler Manufacturing and its employees or representatives are not responsible for any information regarding final specifications of any workpiece that is created as a final product when using Rottler equipment. It is the responsibility of the end user of Rottler equipment to determine the final dimensions and finishes of the workpiece that they are working on. Any information regarding final dimensions and finishes that appears in any Rottler literature or that is expressed by anyone representing Rottler is to be regarded as general information to help with the demonstration of or for operator training of Rottler equipment.

## Limited Warranty

Rottler Manufacturing Company Model EM45 parts and equipment is warranted as to materials and workmanship. This limited warranty remains in effect for one year from the date of installation or two years from the date of the original shipment from Rottler or whichever date occurs first. This only applies if the machine is owned and operated by the original purchaser and is operated and maintained as per the instructions in the manual. A machine is warranted only if the Installation Report has been properly executed by a certified installation person and received by Rottler at the time of actual installation.

The products are warranted upon delivery to conform to their published specifications and to be free from defects in material and workmanship under normal use for a period of one year from shipment. Should a product not be as warranted, Rottler sole obligation shall be, at its option, to repair, correct or replace the product or to refund the amounts paid for the Product upon its return to a location designated by Rottler. No warranty shall extend to rapid wear Products (including tooling) or to Products which have been subject to misuse (including any use contrary to Rottler instructions), neglect, accident (including during shipment), improper handling or installation, or subject to any modification, repair or service not certified by Rottler. Rottler shall not be liable for any consequential, direct or indirect damages or for any other injury or loss. Buyer waives any right, beyond the foregoing warranty, to make a claim against Rottler. No warranty is provided for any Products not paid in full.

Merchandise cannot be returned to Rottler without prior approval. Customer must contact the Parts Department to get approval and to be issued a Return Goods Authorization number (**RGR#**). Merchandise authorized for return must be returned prepaid. If merchandise is returned with shipping charges collect, the actual amount of these charges may be deducted from any credit which may be due the customer. The **RGR #** assigned by the Parts Department should be written on the shipping label and must appear on a copy of the invoice(s) covering the original shipment. This invoice copy must be included in the box with the parts. Shipment must contain **ONLY** those items on the **RGR** as approved for return. Merchandise must be received within 10 days of the date of **RGR** or the **RGR** will be canceled. All returned merchandise may be subject to a 20% restocking fee on under \$1,000.00 amount or 10% on any items over \$1,000.00. Parts or tooling over 30 days old are considered as customer property and can only be returned with prior approval from Rottler Corporation Management.

The issuance of an **RGR DOES NOT** guarantee credit - it is only authorization for the return of the goods. Credit for return merchandise is at the sole discretion of Rottler. Credit will be issued only after inspection of returned goods.


Tools proven to be defective within the warranty period will be repaired or replaced at the factory's option.

We accept no responsibility for defects caused by external damage, wear, abuse, or misuse, nor do we accept any obligation to provide compensation for direct or indirect costs in connection with cases covered by the warranty.


## Online Documentation Access

Online documentation for machines and optional equipment, including manuals and catalogs, can be accessed at the Rottler website. To access documentation, open your browser and navigate to <https://www.rottlermfg.com>

Scroll to the bottom of the page and under the “Owner Resources” title, click the type of documentation you want to access.

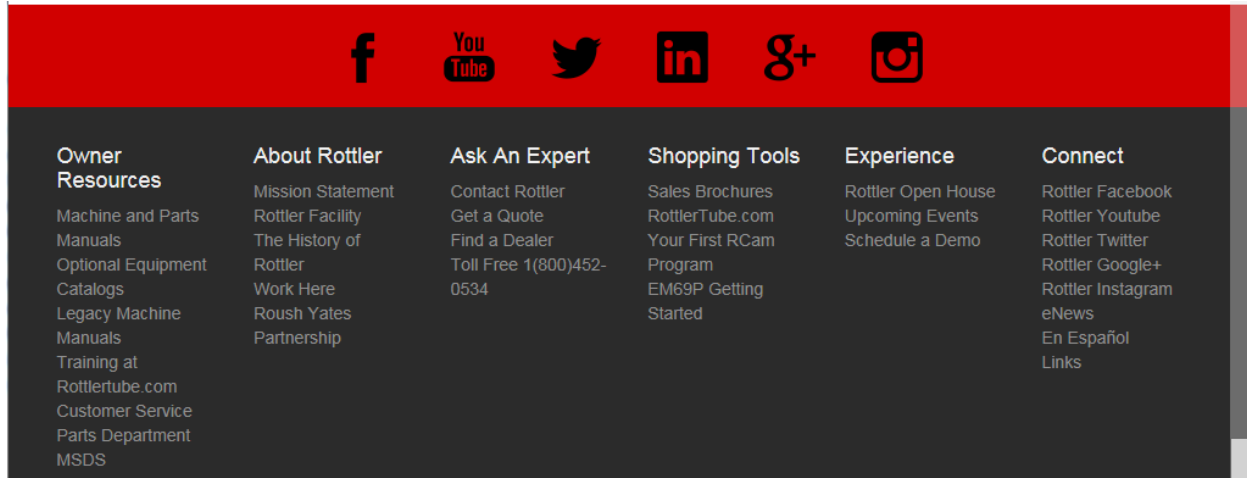

If a log-in window pops up asking for a username and password, fill in the blanks as shown:

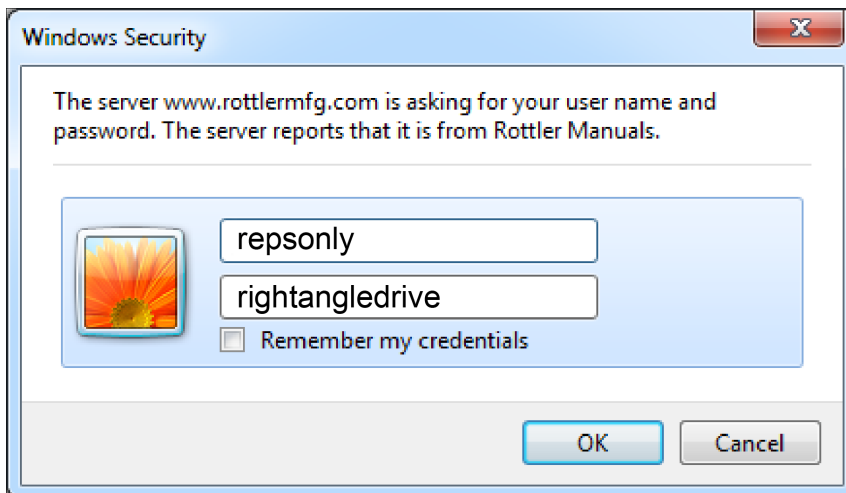





# MAINTENANCE

## Contents

<b>Quick Reference Lubrication Chart .....</b>	<b>2-2</b>
<b>Quick Reference Preventative Maintenance Chart.....</b>	<b>2-2</b>
<b>Maintenance .....</b>	<b>2-3</b>
<b>Lubrication.....</b>	<b>2-3</b>
Ballscrew Drive Bearings .....	2-3
Linear Bearings .....	2-3
Right Angle Drive Lubrication .....	2-4
<b>Magnescale Indicator Setup .....</b>	<b>2-5</b>
<b>Spindle Maintenance.....</b>	<b>2-6</b>
Spindle Drive Belt Replacement .....	2-6
Spindle Replacement.....	2-8
<b>Setting up Rottler Flycutter with Two Inserts.....</b>	<b>2-9</b>
<b>Software Backlash Settings.....</b>	<b>2-10</b>
<b>Digital Micrometer Setting Instructions .....</b>	<b>2-17</b>
<b>Probe “On-Center” Adjustment .....</b>	<b>2-21</b>
<b>Replacing Motherboard Battery .....</b>	<b>2-25</b>
<b>Ballscrew Assembly References .....</b>	<b>2-28</b>
Alignment Definitions for Angular Bearings and Belleville Washers .....	2-28
Ballscrew Drive Side Bearing Arrangement .....	2-29
<b>Wiring, Air, and Oil Diagrams.....</b>	<b>2-30</b>

### Quick Reference Lubrication Chart

Refer to the maintenance section in the manual for lubrication location points and instruction.

Assembly	Frequency	Lubrication Operation	Recommended Lubricant	Date Service
Ballscrew Drive Bearings	175 Hours	Grease	NLGI #2 White Lithium Grease	
Linear Bearings	1000 Hours	Grease	Showa Shell Alvania S2 or Equivalent	

### Quick Reference Preventative Maintenance Chart

Refer to the procedures in the maintenance section of the manual to make or check these adjustments. Not all items listed in the table below have adjustment. The information should be recorded, and the amount of wear tracked so the part can be replaced before down time on the machine occurs.


Procedure	Frequency	Date Serviced/Comments
X, Y, Z Auto Mode Backlash Adjustment	1000 Hours	
X, Y, Z Handwheel Backlash Adjustment	1000 Hours	
Electrical Enclosure Air Filter Replacement	1000 Hours	
Machine Level Adjustment	1000 Hours	
Spindle Drive Belt Adjustment	1000 Hours	
Ballscrew Inspection	2000 Hours	

## Maintenance

### Lubrication

Refer to images following these written instructions:


Below are the directions that explain how and where to add oil to the different systems.

 **CAUTION** Do not overfill any of the lubrication points, serious electrical damage may result.

### Ballscrew Drive Bearings

Every 1000 hours:

The drive end of each Axis' ballscrew is supported by a bearing pack that needs to be greased using a grease gun and NLGI #2 White Lithium Grease. To access these, detach and collapse the rear Y-Axis bellows cover and the right-hand X-Axis bellows cover via the access window (right-hand curtain hidden for view). The grease fitting positions are shown below.

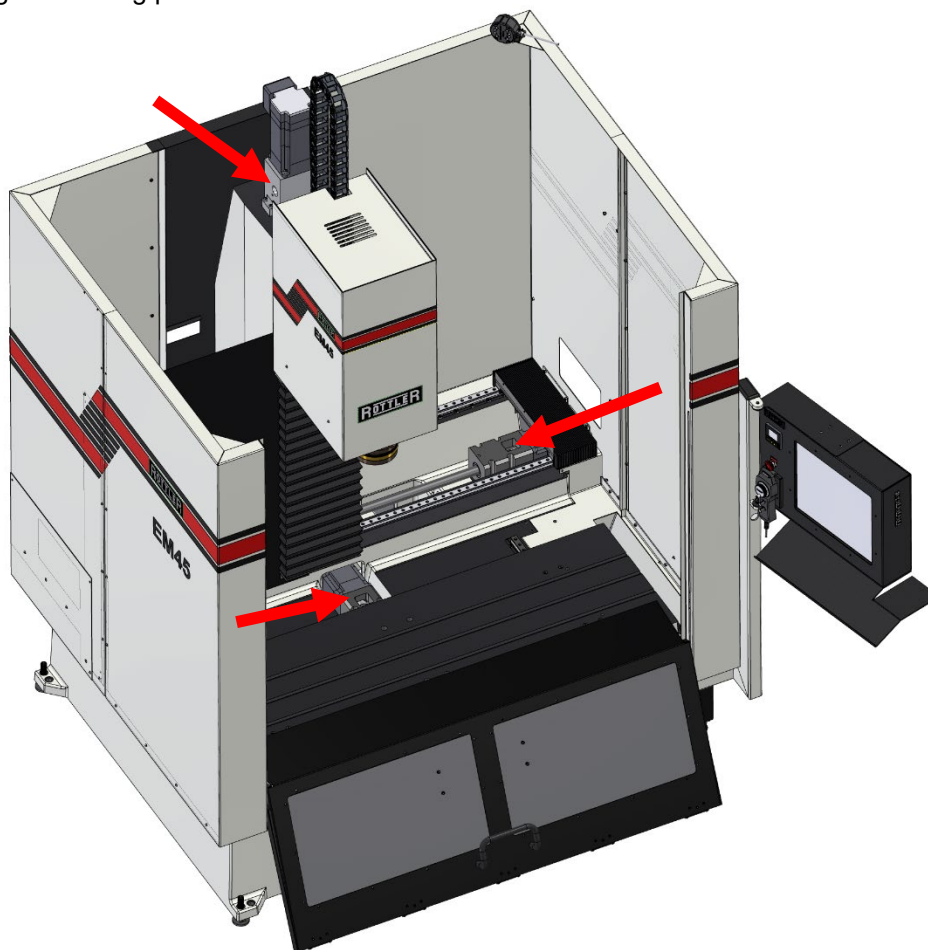

### Linear Bearings

Every 1000 Hours:

Grease each linear bearing using a grease gun and Showa Shell Alvania S2 or equivalent. To access these bearings, detach the bellows from the table, column, and spindle and collapse them. The grease fittings should be accessible. Grease each bearing then move the axis and finish greasing.


## Right Angle Drive Lubrication

All right-angle drives require lubrication at the point where the pinion drive intersects with the drive gear. This is generally in the area where the cutterhead is attached, except for the units that have belt drive. There will be a small pipe plug that is removed to check oil level and add oil if needed. See illustration below for general locations.

With the drive mounted on the machine spindle, the oil level should be even with the bottom of the pipe plug threads.

All Rottler Right Angle Drives are filled with Union 76 Turbine Oil 68 prior to shipment. Use this or an equivalent ISO VG68 oil if the need to add or change oil arises.

When adding oil, fill until oil starts to run out of fill hole. Allow excess oil to drain, then coat pipe plug threads with anti-seize compound and replace it.

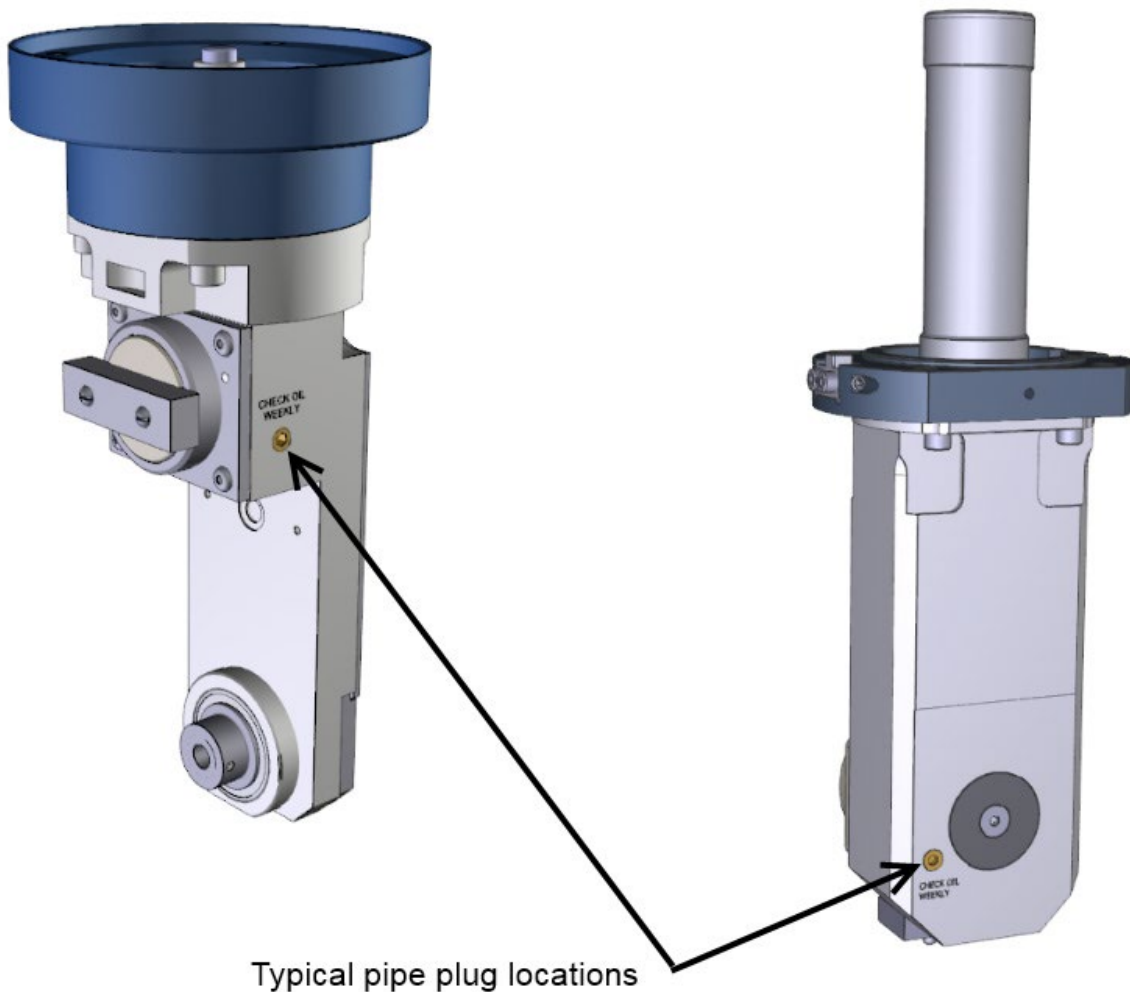

## Magnescale Indicator Set Up

- Turn off power to Magnescale by unplugging the connector on the back of the unit. Or having someone else shut off the power while you stay in front of the unit.
- Plug it back in while you are holding down the reset button. You will see either “mm” or “in”
- While the still holding the reset button down, press the mode button and both the “mm” or “in” will start blinking, you are now in edit mode.
- You can now release the reset button, use the up arrow to switch between “mm” and “in” hit the set button to lock in the selection

## Setting Up Sensor Stroke Depth.

Press and hold set and mode until options menu starts blinking. Push mode once to switch to rSLP and then press up arrow to set +.0005.




- Push set once, and then mode ONE time, then rSL should be blinking
- Press and hold set and mode until options menu starts blinking. Push mode once to switch to rSL and then press up arrow to set +.0002.



- Push set once, and then mode button.



- Should be set to rEF > OFF
- Push mode button once.



- Should be set to E\_St > St
- Push mode button once. You should be back to the main readout screen
- Depress the plunger it should go from zero to max of .2000-2500

## Spindle Maintenance


### Spindle Drive Belt Replacement

 **CAUTION** Turn off power to machine before proceeding with this procedure.


The spindle drive belt is located in the spindle housing.

To adjust the belt tension, it is only necessary to loosen the Motor Mount Plate bolts

Open or remove the Spindle Door.

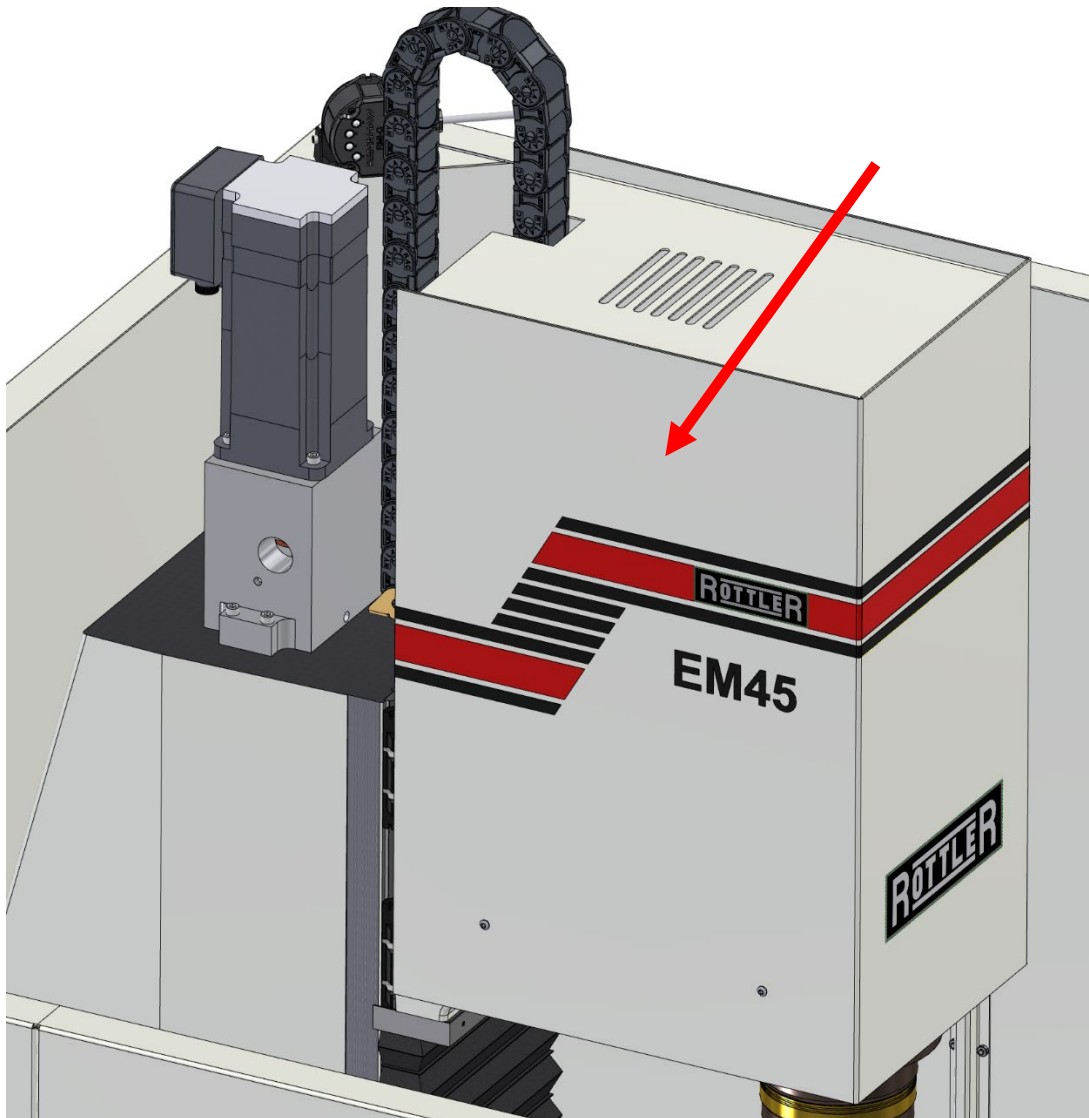

Loosen the Motor Mount Plate bolts (4) and use the adjustment screw to loosen the belt tension as required:

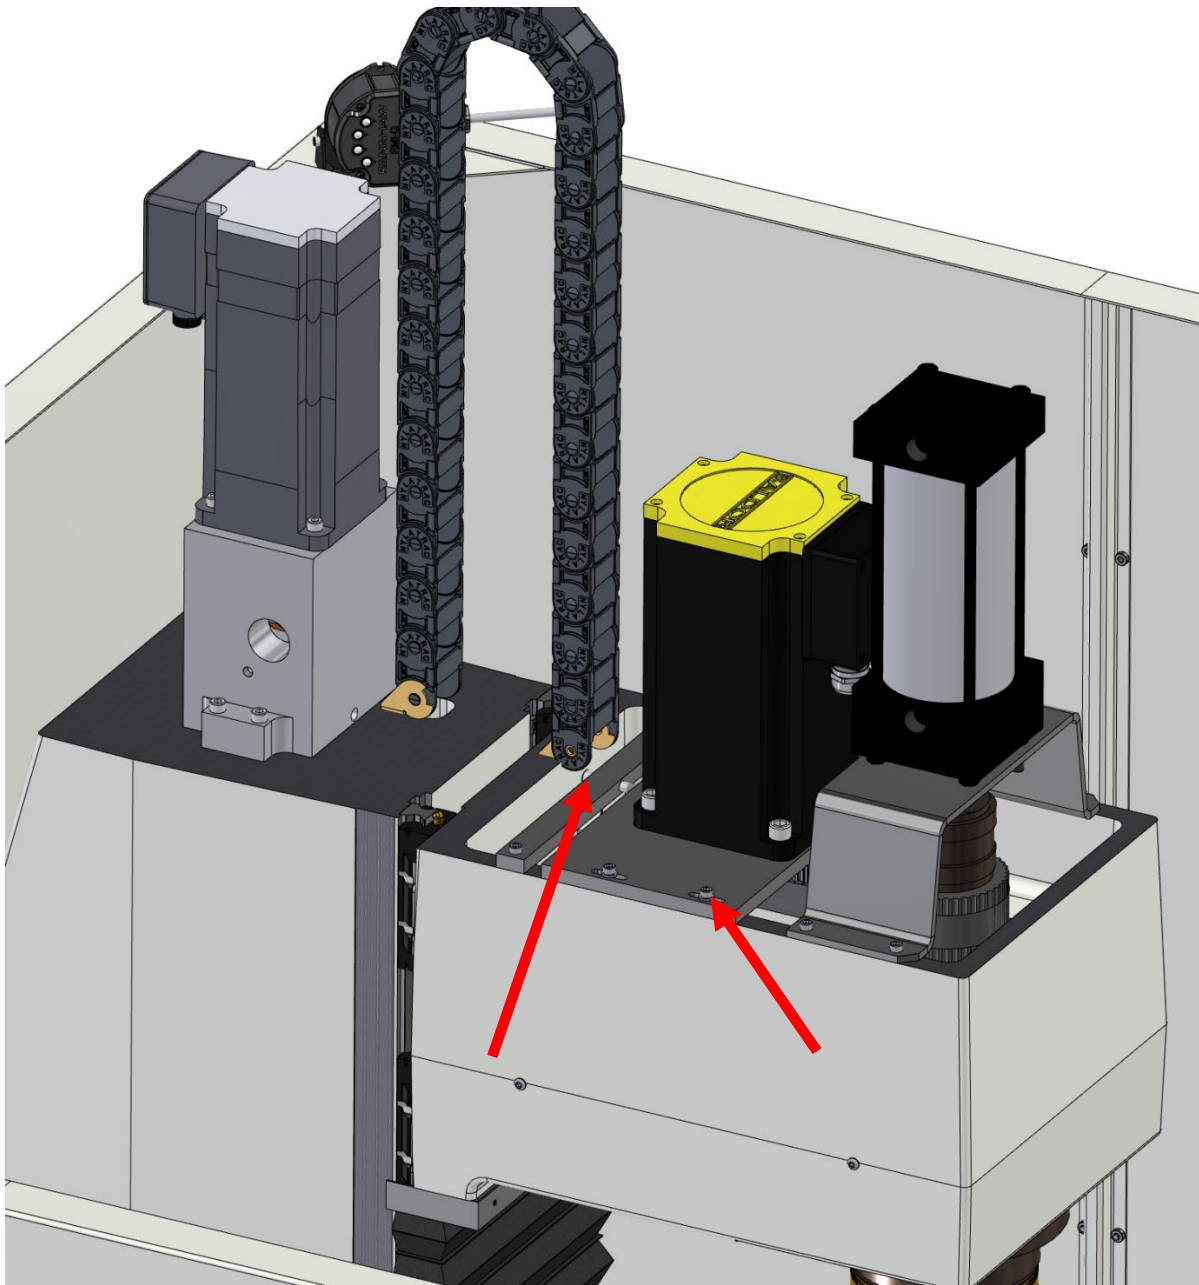

Remove the belt by passing one side between the drawbar cylinder and the top of the drawbar. It may be necessary to loosen the drawbar cylinder to provide additional clearance.

To install the new belt, follow this same procedure in reverse. The proper belt tension should result in approximately .11in (2.8mm) of travel with 7.9-8.5lb of force applied between the pulleys.

## Spindle Replacement

The spindle of the EM45 is a sealed cartridge unit and its internal components can not be replaced individually. If the spindle is damaged, it will be necessary to replace the entire unit.

To remove the spindle cartridge unit, follow the steps in the belt replacement section to loosen the drive belt.

Lower the Z-Axis, it may be helpful to place a support under the spindle. Carefully loosen the (8) M10 bolts around the flange of the spindle unit.

Raise the Z-Axis slowly using the handwheel to lift it off of the spindle unit. Remove and set aside the damaged spindle unit


**Note: The spindle unit weighs approximately 100lb (45.4kg).**

Replace the spindle unit by following this same procedure in reverse, torque the M10 bolts to **50 Ft\*lb**.



## Setting Up Rottler Flycutter With Two Inserts

1. Travel the spindle to the center of the machine bed.
2. Go to the Rottler home screen on the machine before proceeding.
3. Remove the cutter head shroud from the fly cutter. Attach a dial runout indicator to a cylinder head or engine block, etc.
4. Rotate cutter head and check to see that both inserts are the same distance from the center of the spindle, within .004.
5. If adjustment is necessary loosen the tool holder clamp wedge, and the height adjustment screw. Move tool in or out the required distance. Tighten the clamp wedge. Snug up the height adjustment screw. There is a set screw located at the bottom of the tool holder; it locks a dowel pin in place.
6. When the in-out adjustment is set, loosen the set screw, the pin will pop out and hit the back of the slot. Tighten the set screw. This way, when a tool holder is removed and then replaced, it will be located very nearly where it was.
7. Insert height will still need to be adjusted.
8. Rotate cutter head and check to see that both inserts are the same height within .0015-.0003. If adjustment is necessary loosen the tool holder clamp wedge, then alternately loosen and tighten the height adjusting screw and the retaining screw, until both inserts are set as desired.
9. Retighten the tool holder clamp wedge and recheck both inserts.

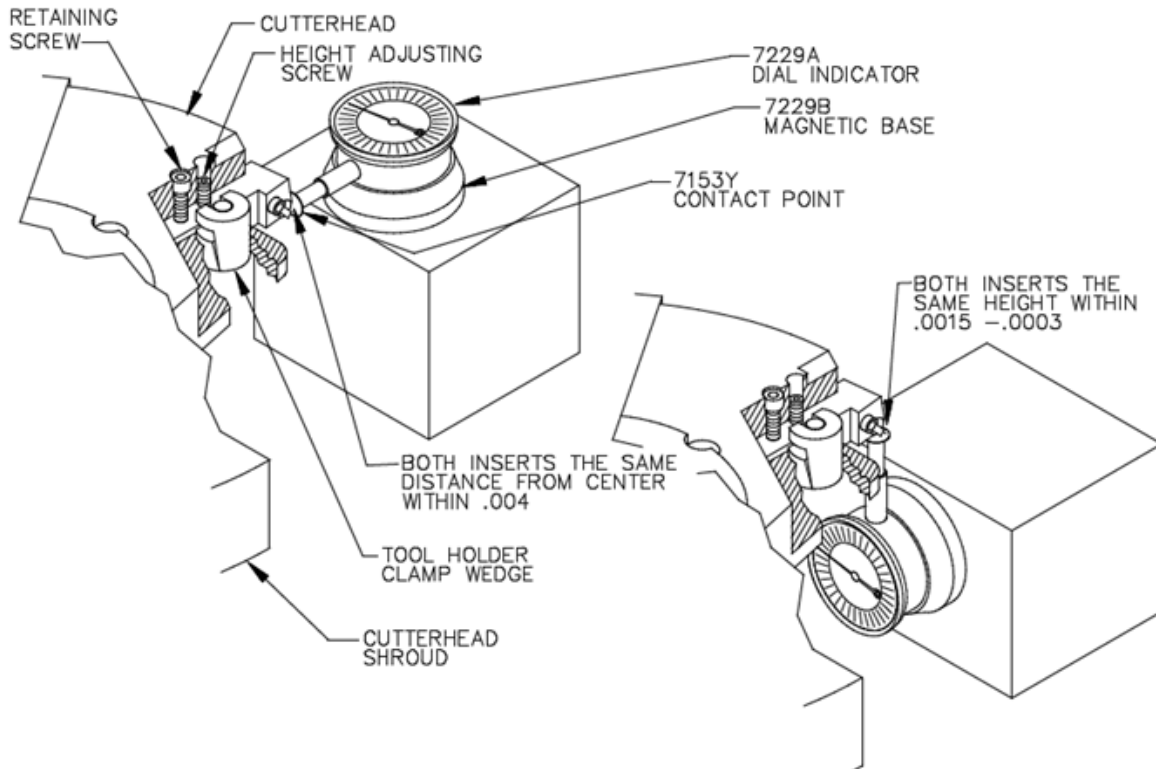


## Software Backlash Settings


The Screens depicted below are for setting Backlash compensation values only. DO NOT use any other information on these screens to change information on the machine.

Turn off “Overshoot Backlash Setup”

Go to Setup Software>Addins>Overshoot Backlash Setup

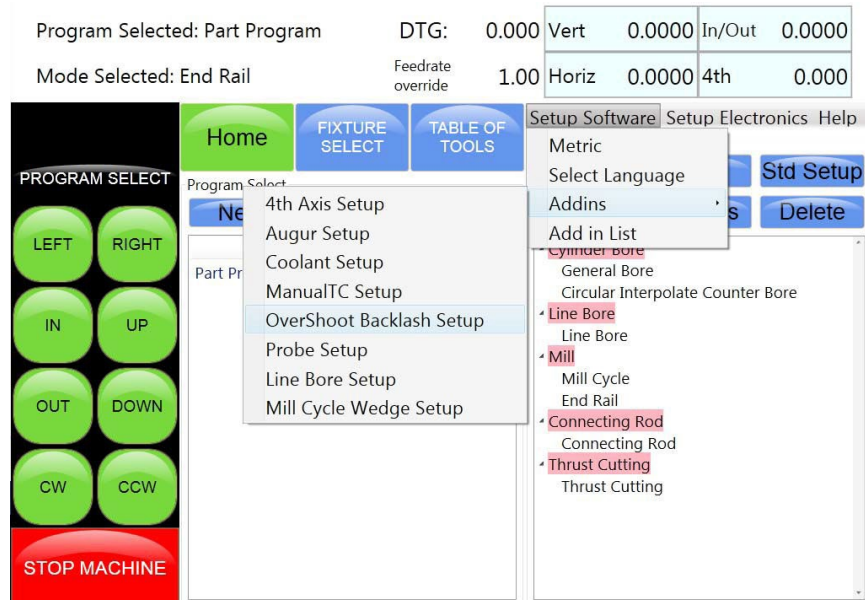


The Following screen will appear.

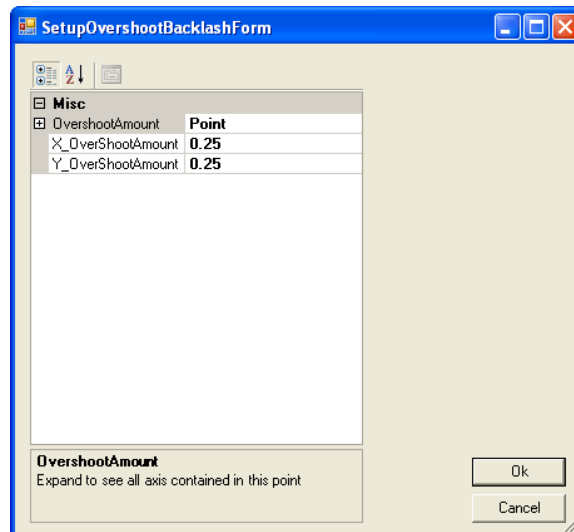


1. Record the existing X and Y “Overshoot Amount”. Generally, .250
2. Use the “On Screen Keyboard”, or plug in the full-size keyboard, and change the amounts to 0.00, and click on OK. Close the “Setup” screen.

3. Go to Setup Electronics>Control

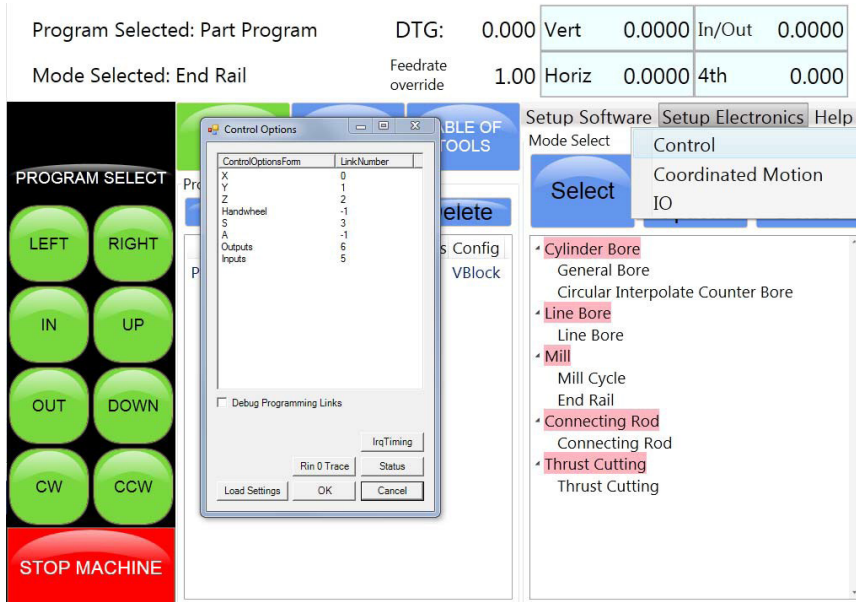

4. On the “Control Options” screen, double click the X to bring up the “X Options” screen.

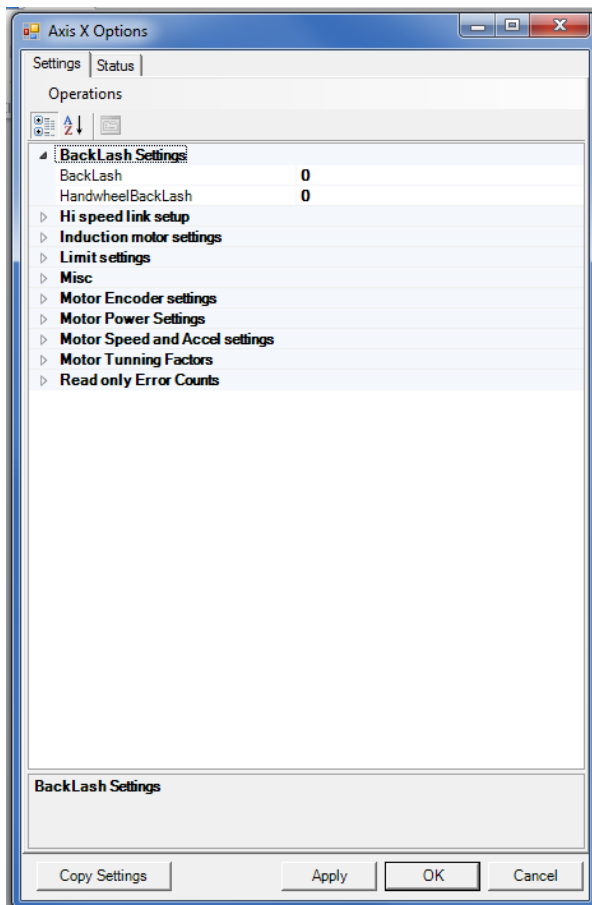

Minimize the screen

- Repeat step 5 for the Y and Z axis.
- Close the “Control Options” screen.

7. Select a program (block), then select any cylinder bore mode.

Program Selected: test	DTG: 0.000	Vert 0.0000	In/Out 0.0000
Mode Selected: General Bore	Feedrate override 1.00	Horiz 0.0000	4th 0.000

Set Zeros	Vertical Stops	Locations
<b>Zeros</b>	Actual Position	Handwheel
VERTICAL	0.0000	.010 .001 .0001
HORIZONTAL	0.0000	.010 .001 .0001
IN/OUT	0.0000	.010 .001 .0001
SPINDLE	0.00	10x Coarse Fine

Spindle Load	0.0%
Feed Rate	0.0020
Spindle RPM	400

Buttons: STOP MACHINE, MOVE TO ZEROS, CW INDEX, CCW INDEX, START SPINDLE, PROBE AUTO CENTER, Set Active (multiple)

**Notes:**

\*\*\*The photos shown are demonstrating the X axis (horizontal) backlash adjustment. The Y and Z axes are adjusted following the same steps.


\*\*\*The direction of machine travel to put the initial load on the dial indicator, are as follows: X (horizontal), from the right toward the left. Y (in/out), from back toward the front. Z (vertical) from top toward the bottom.

A Dial Indicator with 1.0" to 1.5" of travel should be used for several reasons.



If the axis is overshooting or coming to position slowly you will be able to see it with a dial indicator. With the digital indicator you will only see the end position. The Magnascale indicator should be used to dial or tram in. The automatic moves of the machine can "Shock" the sensitive plunger of the Magnascale.

- Attach the magnetic base and dial indicator to a stationary stand, parallel, or engine block fixed to the machine bed.

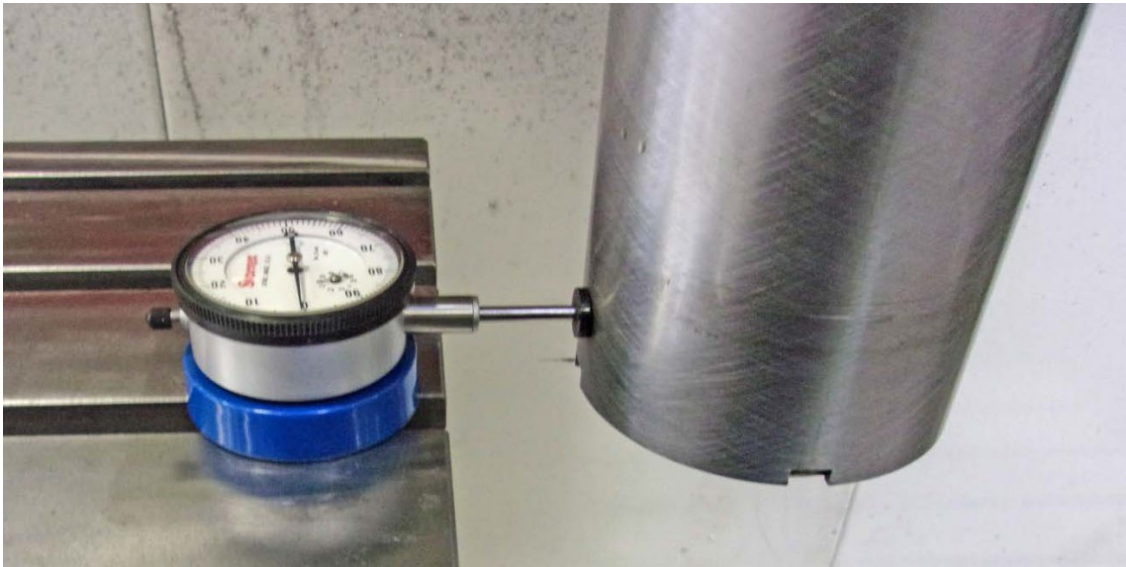

- Bring the spindle of the machine in position to put a slight load on the Plunger, about .020".
- Set "Vertical, Horizontal, In/Out" zero.

Program Selected: test      0.000    Vert    0.0000    In/Out    0.0000

Mode Selected: General Bore      1.00    Horiz    0.0000    4th      0.000


Set Zeros		Vertical Stops	Locations		
Zero	Actual Position	Handwheel		Move To	
VERTICAL	0.0000	.010	.001	.0001	MoveTo Tool #: -1
HORIZONTAL	0.0000	.010	.001	.0001	MoveTo Set Active
IN/OUT	0.0000	.010	.001	.0001	MoveTo
SPINDLE	0.00	10x	Coarse	Fine	MoveTo Probe #: -1

**PROGRAM SELECT**  
 LEFT    RIGHT  
 IN      UP  
 OUT    DOWN  
 CW     CCW  
**STOP MACHINE**


Spindle Load      **0.0%**  
 Feed Rate          **0.0020**  
 Spindle RPM        **400**  
**PROBE AUTO CENTER**

**MOVE TO ZEROS**  
 CW INDEX    CCW INDEX  
**START SPINDLE**

11. Set all vertical stops to “zero”

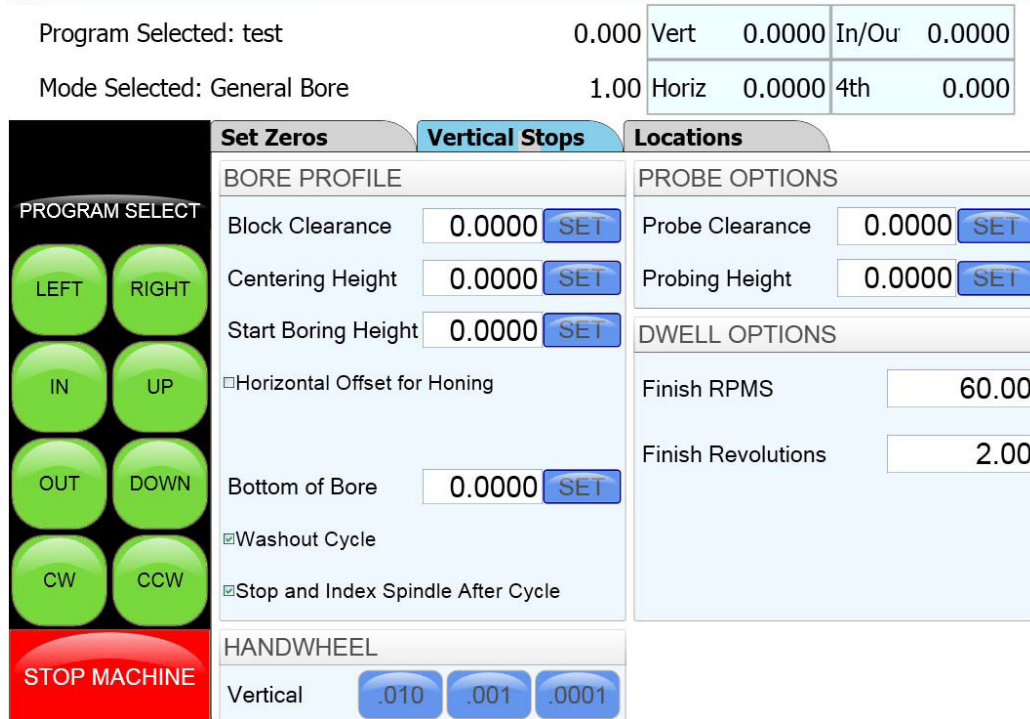


12. Move the machine spindle away from the Plunger a few inches and press “Move to”. Enter 0 for the value and press “Enter” for the axis being measured

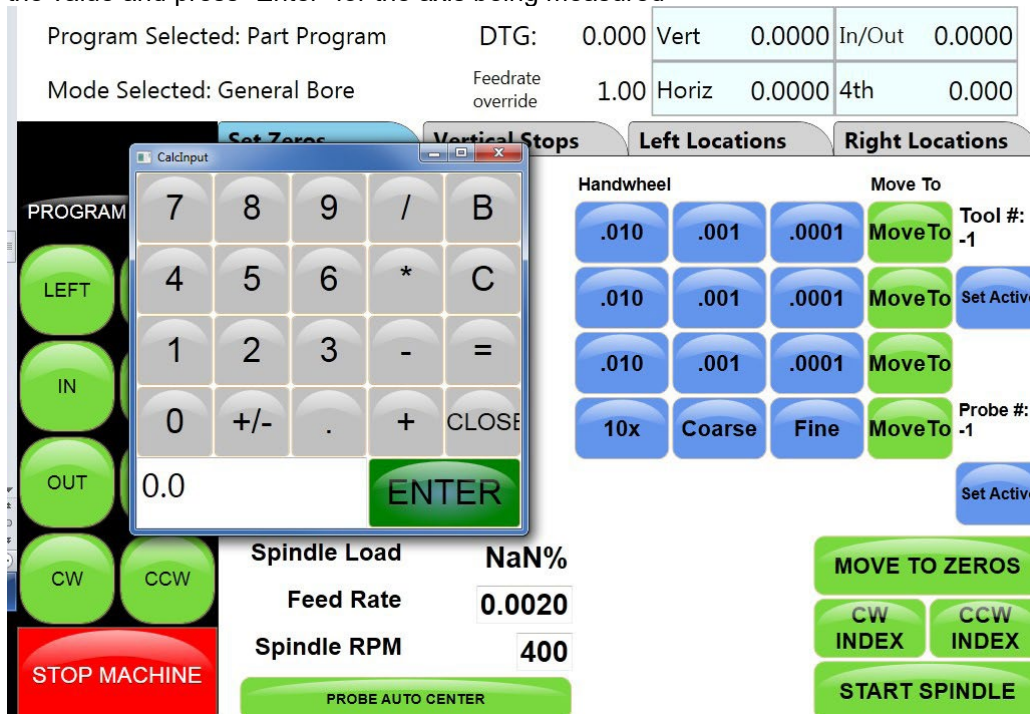

- 13. Repeat the movement to verify the machine will repeatedly position itself at zero.
- 14. Now use the “Move To” button and enter -0.200 to move the spindle in the opposite direction
- 15. Press “Move To” and enter 0 for the axis being measured

If the machine did not position itself to bring the digital readout to zero, a backlash compensation adjustment is needed.

16. To adjust the backlash compensation, maximize the “Axis X Options” screen. Go to “Backlash Settings” > “Backlash”

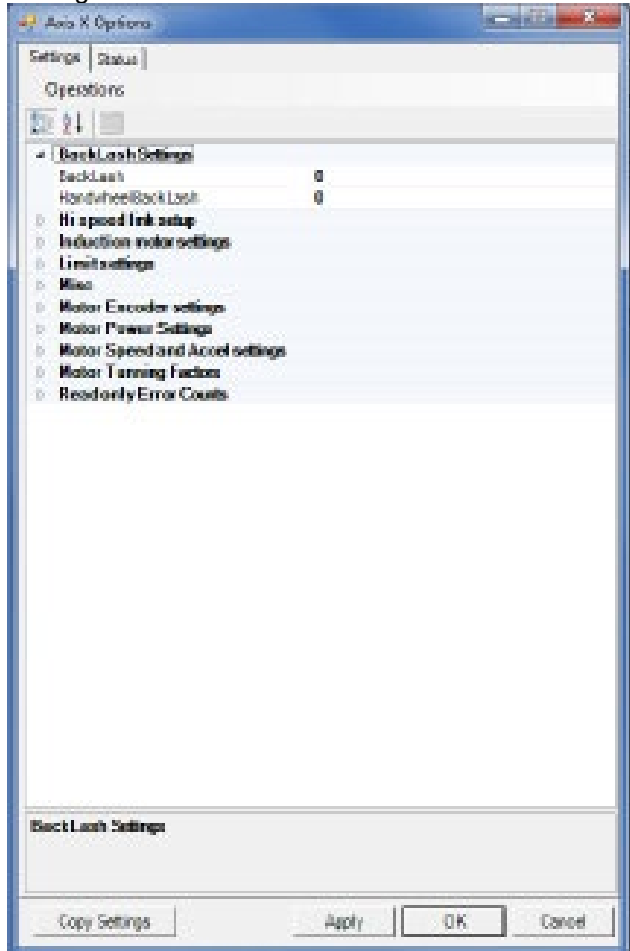


17. Use the on-screen keyboard, or plug in a keyboard, to enter the amount of correction in the Backlash area. Press “Apply” when you are done.
18. Repeat steps 13 through 17 and adjust as needed until the machine positions itself to zero on the digital read out from both directions

Handwheel Backlash is measured in a similar way to backlash but the axes are moved using the Handwheel, NOT the “Move To” buttons.

19. Set up the dial indicator as described in steps 8 and 9
20. Touch the .001” handwheel button and move the axis away. Turn the handwheel at a **constant speed** and move the axis back until the control panel displays zero. If the axis travels past zero, start again. Check that the dial indicator reads zero. If it does not, move away and back again until both the indicator and the control panel reads zero.
21. Now move the axis in the opposite direction and stop about 0.020” less than the total plunger travel before compressing the plunger all the way. Now move the axis back by turning the handwheel at a **constant speed** until the control panel reads zero. Check the reading on the dial indicator.

22. Use the on-screen keyboard or plug in a keyboard to enter the amount of correction in the Handwheel Backlash field. Press “Apply” when you are done.

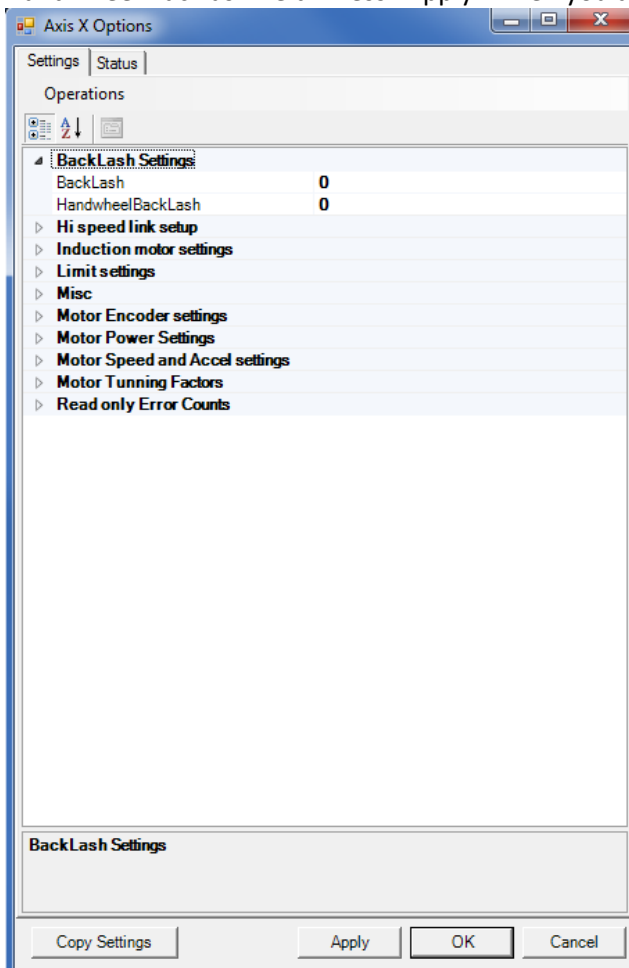

23. Follow steps 9 through 22 for the Y- and Z-Axis adjustments  
24. When finished, re-enter the “Overshoot Backlash Amounts” as recorded in step 2 and click “OK” to close the window.




## Digital Micrometer Setting Instructions

Turn the thimble until the '0' line on the thimble lines up with the vertical line nearest the spindle lock ring.




Determine which cutter head bore range the micrometer is going to be used on. ( example; 2.9 – 6.0 )  
We want to initially set the micrometer to the minimum bore diameter of this cutterhead.

**NOTE: MICROMETER CAN NOT BE PROGRAMMED IF THE LETTERS INC APPEAR IN THE DISPLAY.** To get rid of INC, quickly press the in/mm/ABS button.

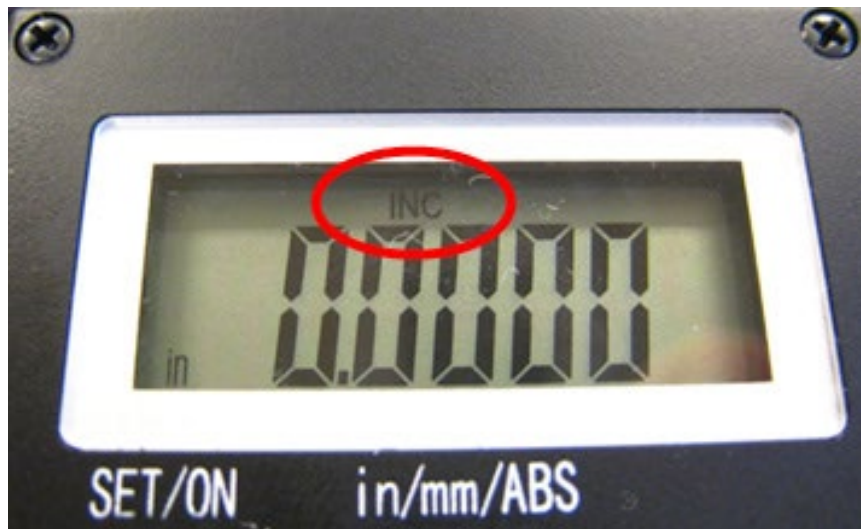

## To set or edit micrometer

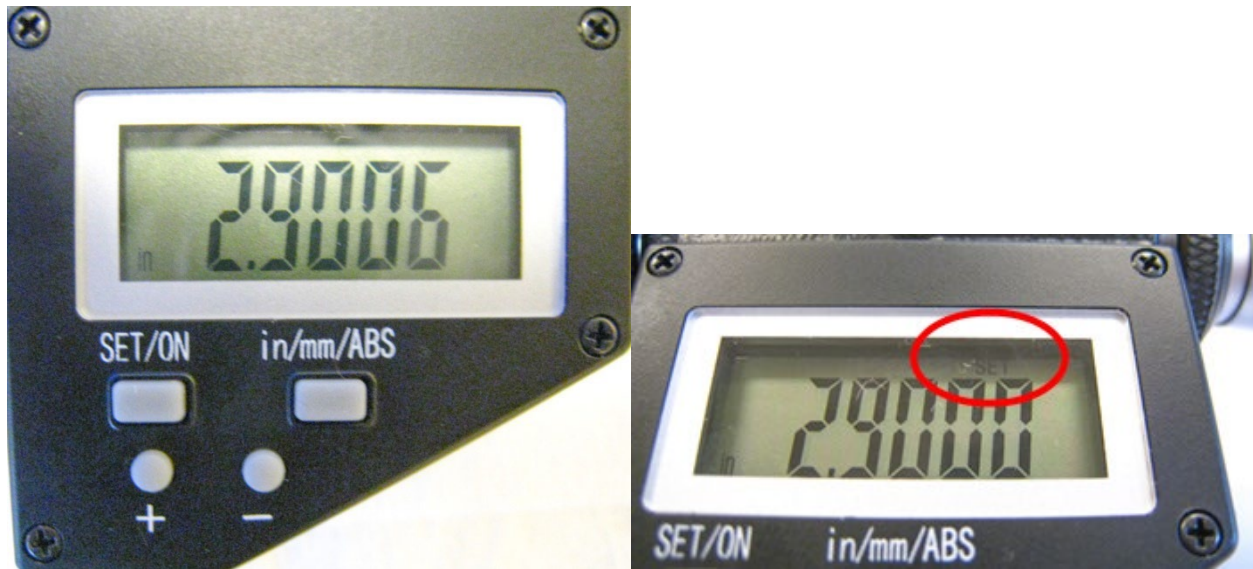

Press and hold the set/on button and the + or – button at the same time. “Set” will flash in the display. This places the micrometer in edit mode. (CAUTION: use a pencil tip or something similar to gently push the small round buttons - they are quite small and a bit delicate.)

Press and hold the + or – buttons to change the display number to the minimum bore diameter determined earlier (example; 2.9). Caution: Pushing the + or – buttons and holding in place will cause the numbers to scroll automatically. The numbers will count slowly at first and once 0.010” has been counted off the scrolling speed will pick dramatically.

After you have reached the desired number in the display, press the set/on button twice quickly to exit the edit mode. “Set” should no longer be flashing in the display. The micrometer is now ready for use.

CAUTION: AFTER MICROMETER SET-UP IS COMPLETE, DO NOT PUSH SET/ON BUTTON AGAIN. PUSHING THE SET/ON BUTTON DURING USE WILL RETURN THE DISPLAY TO THE ORIGINAL MINIMUM BORE DIAMETER. THE ONLY TIME YOU SHOULD USE THE SET/ON BUTTON AGAIN IS-  
 A. To shut micrometer off at which time you push and hold the button or B. To turn micrometer display back on at which time you push button one time. The display will then show the last reading before micrometer was shut off.

CAUTION: DO NOT BACK THE THIMBLE ALL THE WAY OUT TO THE END OF IT’S TRAVEL. ONCE THE THIMBLE IS BACKED ALL THE WAY OUT, IT WILL NO LONGER ROTATE PROPERLY AND THE DIGITAL HEAD WILL NEED TO BE REPLACED.

Micrometer is calibrated in inch mode. If metric is desired, press and hold in/mm/ABS button until mode changes to metric (approximately 3-4 seconds). A quick press of the in/mm/ABS button will put micrometer in ABS mode: 0.000, with another quick press returning it to initial setting.

Set up the cutter head and bore a set up hole. Measure the bore accurately. Set the digital display to this bore dimension and then -

Loosen the set screw holding the large diameter anvil. Slide the anvil back out of the way.



Place the tool holder used to bore the hole into the micrometer frame. Slide the location nub on the back of the tool holder gently up against the end of the digital micrometer shaft.



Slide the large diameter anvil up until it touches the end of the cutting tip of the tool holder. Tighten the set screw.



Back the digital micrometer shaft off, then bring it up to touch the tool holder and recheck that the numbers in the display are the same as the numbers previously shown.



The micrometer is now set up for use with this cutter head.

**Note:** this procedure must be repeated to set the micrometer to a different cutter head. The micrometer can only be set to one cutter head at a time.

To shut off micrometer press and hold set/on button until screen goes blank or let micrometer set until display disappears.

With initial setting of micrometer it is recommended that you use the procedure detailed below in the event you think you have size problems.



**Procedure:**

The short vertical lines that cross the horizontal scale on the micrometer sleeve are reference marks. Set the zero on the micrometer thimble even with the first vertical line and note the size shown in the digital display. Record this size for future reference. Now follow the same procedure for each line and record the sizes. At any time you feel your micrometer is reading incorrectly, you can quickly refer to the recorded size of the line closest to the range you are using and check that the micrometer is still accurate.


## Probe “On-Center” Adjustment


This covers setup and calibration of the probe, so it will accurately position your machine.

- Verify that the four adjusting screws and two locking screws are installed in the probe tool holder.
- Assemble probe on either CAT 40 Shank or Rottler Taper
- With the machine breaker that supplies power to the probe receiver turned off.
- Install batteries in the probe WITH stylus deflected.

Probe LED check will run.

- Release stylus after battery check this will put you in edit mode.
- First will be Switch off method, you want this at **purple, purple, yellow** (Radio On). If it is not, deflect and release stylus quickly to change the mode.
- Hold the stylus deflected until the colors change to move to the next setting.
- You should be at Switch Off method; it should be **red, red, yellow** (134 seconds). If it is not, deflect and release stylus quickly to change the mode.
- Hold the stylus deflected until the colors change to move to the next setting.
- You should be at Enhanced trigger filter; it should be **green, green, green** (on). If it is not, deflect and release stylus quickly to change the mode.
- Hold the stylus deflected until the colors change again to move to the next setting.
- You should be at Acquisition mode, **light blue, light blue, light blue**.
- Turn on machine and quickly deflect and release the stylus. This must be done within 10 seconds of turning on the power breaker to the probe. If you are watching the RMI-Q (located ON the machine) you will see the right light turn **red, yellow, red, yellow, red, yellow** is shows the partnership has been acquired.
- Go into the software and do a probe auto center and hit start probe to verify that it works correctly.

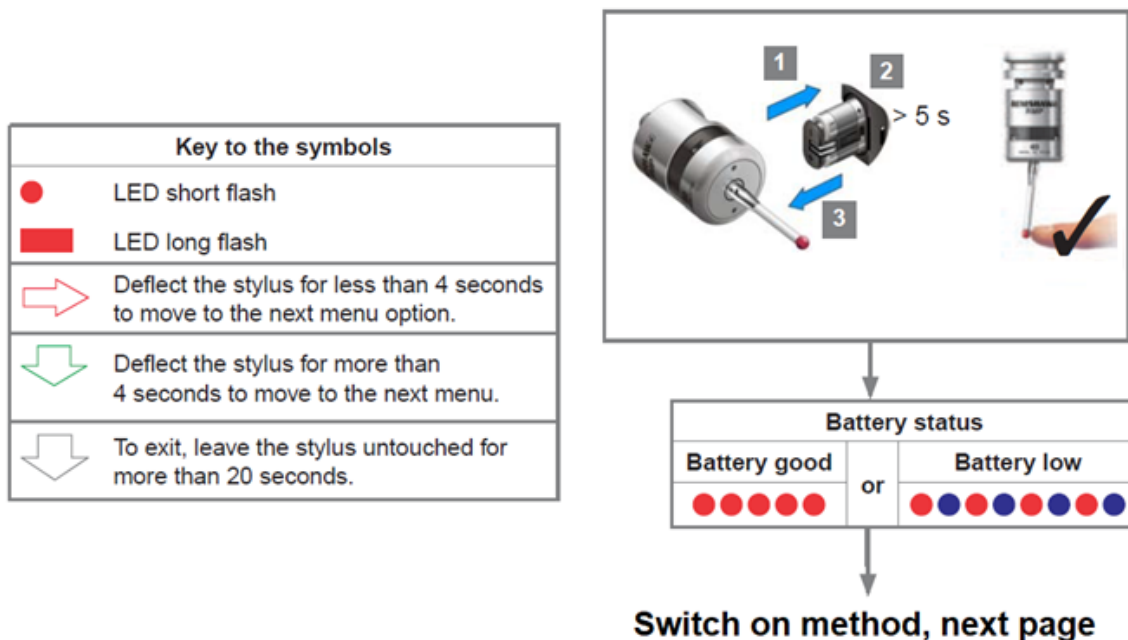


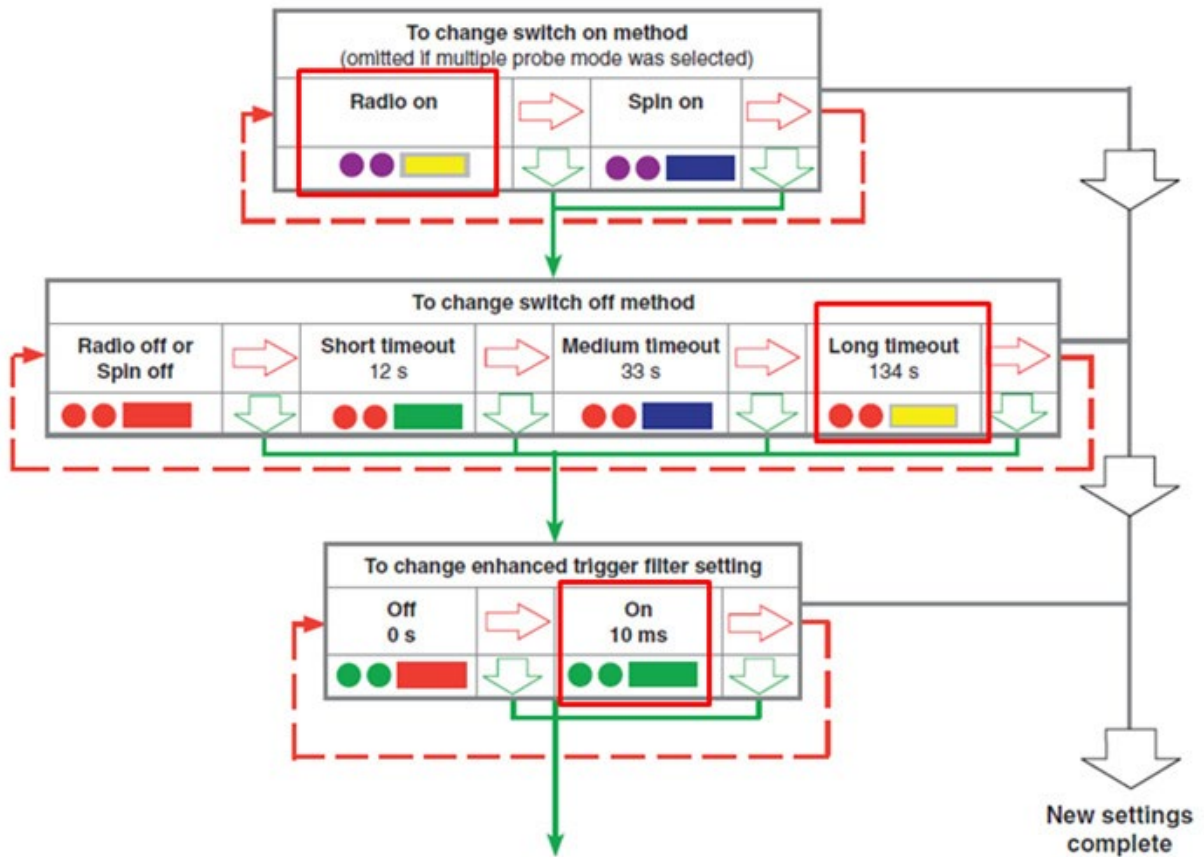


**Changing the probe settings (continued)**

**Note:** After the RMI has been acquired, the RMP40 will only show Acquisition mode off.

See RMP40 - RMI partnership.

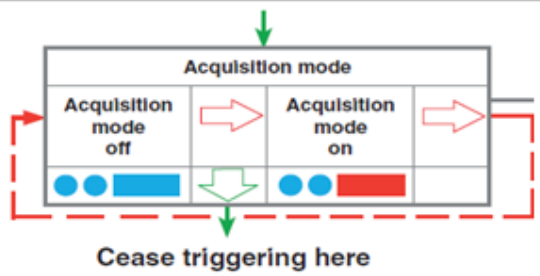

If the Probe does not turn off after 137 seconds you will need to make sure that the RMI-Q switches are shown in the following positions:

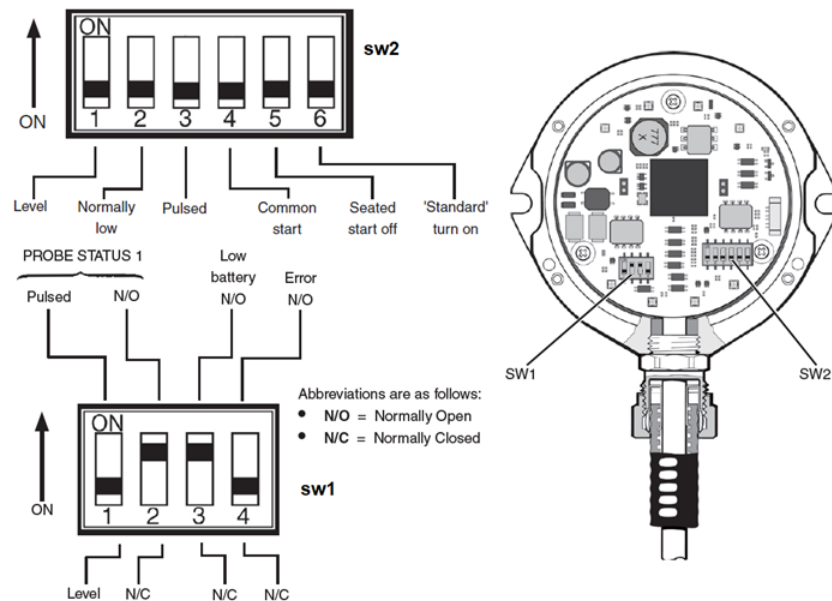


During normal use, the difference between the touch position and the reported position does not change, but it is important that the probe is calibrated in the following circumstances:

- when a probe system is to be used for the first time
- when a new stylus is fitted to the probe
- when it is suspected that the stylus has become distorted or that the probe has crashed
- at regular intervals to compensate for mechanical changes of your machine tool
- if repeatability of relocation of the probe shank is poor. In this case, the probe may need to be recalibrated each time it is selected.

It is good practice to set the tip of the stylus on center, because this reduces the effect of any variation in spindle and tool orientation. A small amount of run-out is acceptable, and can be compensated for as part of the normal calibration process.

- calibrating either in a bored hole of know size, a ring gauge, or on a datum sphere.

### Mounting the probe on a shank

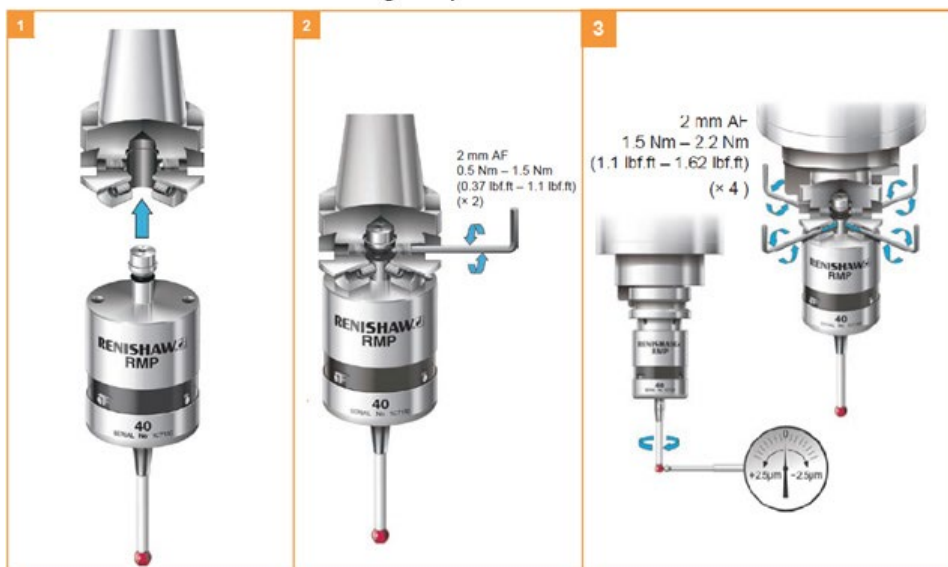


- Dial the probe stylus into center using a .0001" indicator to within .0005" the tighter tolerance you hold the more accurate the machine will be. You must use an indicator that takes very little pressure to get a reading. Excessive pressure on the stylus will deflect the probe and you will not be able to dial it in correctly.
- Go to the Main/Block Model screen and select the Table of Tools. You may only have a Default Tool #0 listed.
- Press Add Tool. This will bring up a dialog box. Change the name from default tool to probe style that you are installing i.e. 50mm stylus, 100mm stylus. Set the diameter to .2360" this is default probe tip on a 50mm, 100mm, and 17.5mm.
- Install a block, or parallels onto the machine and secure it solidly to the machine table.
- Place the Ring Gauge onto the top of the block, use Probe Auto Center to find center zero your X and Y axis here. Make sure you use a ring gauge or a hole of a known diameter. This will set the correct probe timing.
- Adjust the probed diameter by going to the IO under Setup Electronics and changing the Probe MS. You will need to increase or decrease the MS of the probe to achieve correct Probe Diameter.
- Repeat until the correct diameter is displayed.
- Probe Auto Center the ring gauge, without moving X or Y, remove the probe up in Z and Install the cutter head. Put a magnet base with the Last Word indicator on the cutter head and sweep the cylinder/ring gauge.
- The variation in X and Y Should be less than .0005.
- If not add compensation to ProbeOffset under > Setup Eletronics-Addins-ProbeSetup



## Replacing the Motherboard Battery

If computer fails to boot up and you get a CMOS error message on the screen, then the battery on the computer motherboard has failed and needs to be replaced.

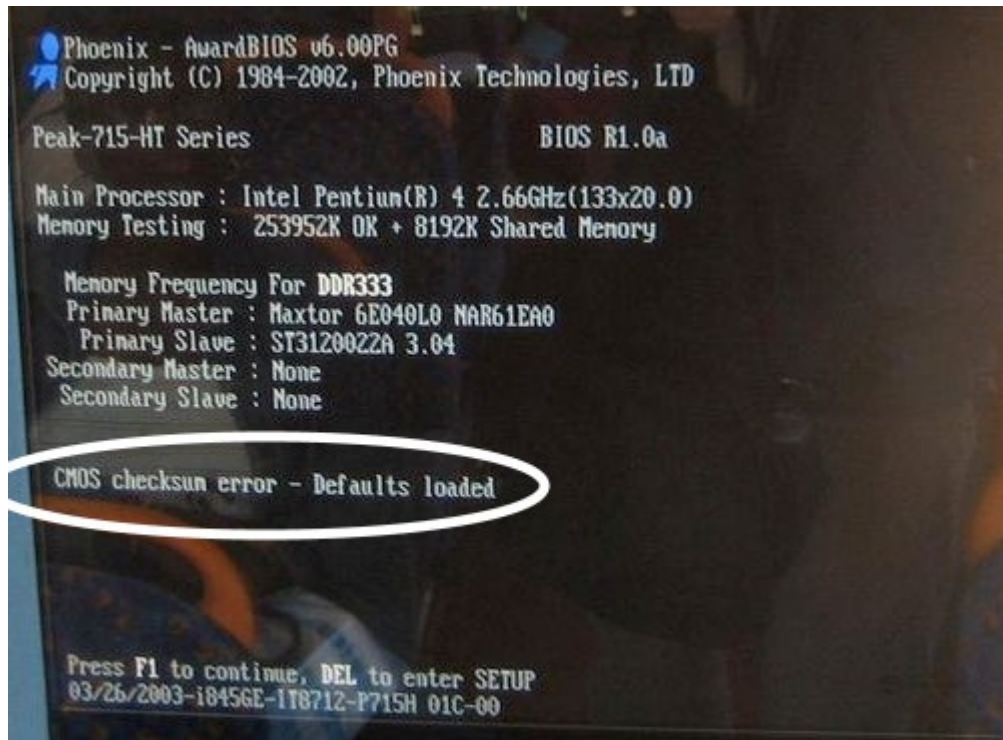

The following is the procedure for replacing the motherboard battery.

Turn off the power on the electrical enclosure and remove the enclosure cover.



Locate the computer and check to see that the power light is not on. If it is on turn off the power switch.

*Note: On some machines it may be necessary to unbolt the computer from the enclosure in order to gain access to the cover screws.*

Remove the 6 screws indicated by the arrows from the cover.

Remove the cover.




Locate the battery on the motherboard.



Push the battery retention clip away from the battery. When the clip is released the battery will pop up.



Remove the battery and place new battery in the battery holder.

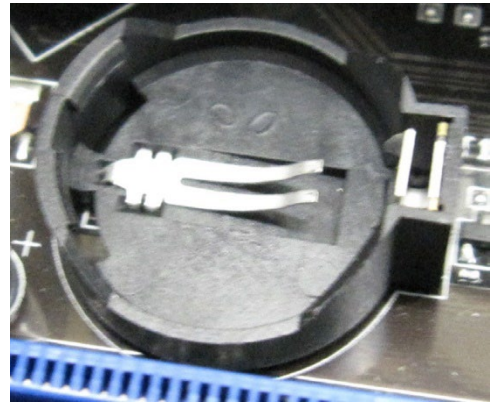

Using your fingertip, push down on the battery until the retention clip is in its lock position.



Replace computer cover and make sure that power switch on the computer is on.  
Replace the enclosure cover and switch power back on.

## Ballscrew Assembly References

### Alignment Definitions for Angular Bearings and Belleville Washers

#### Bearing Alignment




VIEW OPEN END UP



VIEW CLOSED END UP

#### Ballscrew Drive Side Bearing Arrangement

Install 1st and 2nd bearings with open side facing in. Install 3rd and 4th bearings with open end facing out.

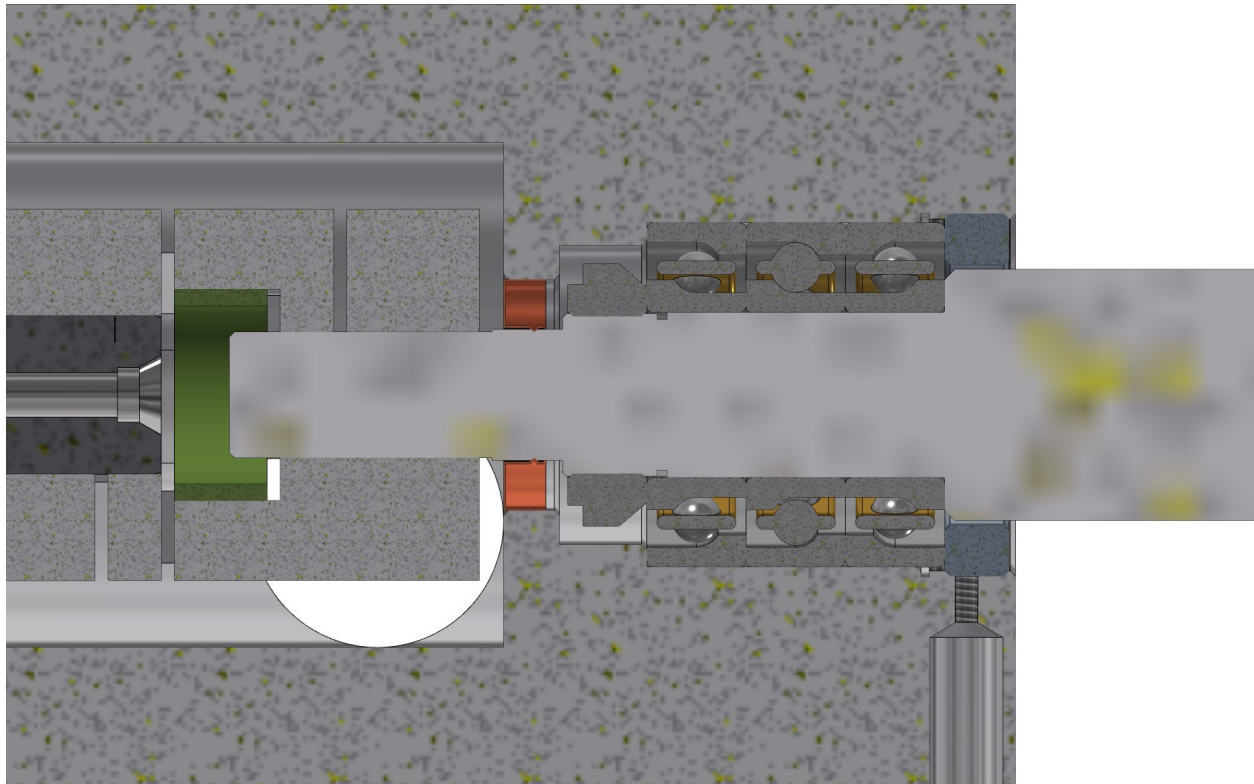

## **Wiring, Air and Oil Line Diagrams**

### **Wiring Diagrams, Air Line Diagrams, Oil Line Diagrams**

**Please visit the service tab of our web page [www.rottlermfg.com](http://www.rottlermfg.com) and Send a Service Request. Or contact the Rottler Factory Service at [service@rottlermfg.com](mailto:service@rottlermfg.com) for assistance.**

**You may also call Rottler at 1-800-452-0534 or 1-253-872-7050**

**Please ensure you have the Machine Model and Serial Number available when contacting Rottler for Service**

# TROUBLESHOOTING

This is a list of common issues with EM45 machines. If the problem you are having is not listed, or if the suggested procedures do not correct it, please contact Rottler Service for further assistance.

Symptom	Possible Causes	Solution
<i>Mechanical:</i>		
Excessive Heat at Spindle	Spindle Bearing Failure	Replace Spindle cartridge
Chatter during boring	Dull Insert	Replace Insert
	Dirt/Oil in the Cutterhead	Disassemble and clean the cutterhead
Machine will not move in .001 or .0001 increments	Backlash out of adjustment	Check backlash bulletin 317
	Damage to components from machine crash	Inspect axis components for damage and replace if needed
Machine moves in jumps when using .001 or .0001 increment	Excessive backlash, unable to compensate	Check backlash, bulletin 317
	Tuning parameters incorrect	Contact Rottler Service
	Damage to components from machine crash	Inspect axis components for damage and replace if needed

<i>Control System:</i>		
Following Error	<i>Mechanical:</i>	
	Binding due to wear; Loose Components due to wear	Check axis drive and wear components and replace if needed
	Damage due to a machine crash	Check components for damage and replace if needed
	<i>Electronic:</i>	
	Control system malfunction	Cycle E-Stop; Reboot system
	Bad Cable – Encoder	Test with a spare cable
	Bad Cable – USB	Test with a spare cable
	Bad Cable – Power	Test cable continuity with meter
	Bad Motor	Test amp with another motor
	Bad Amp	Test amp as described on page 3-#
Bad Power Board	Test with a spare board	
Touchscreen not responding where touched	Touchscreen not calibrated properly	Follow touchscreen alignment procedure.
Backlash over 0.015"	Ballscrew Wear	Inspect Ballscrew and nut for damage/wear; Excessive wear may require a replacement ballscrew

## Touchscreen Alignment Procedure

1. Get to the Alignment screen.
  - a. If an Elo icon is available in the tool tray at the lower right side of the desktop, click it, then click Align.
  - b. Otherwise, go to the Windows Start Menu and find the Elo icon in the list of available programs, select it, then click Align
2. Touch and release the upper left target; the target should jump to the lower right.
3. Touch and release the lower right target; the target should jump to the upper right.
4. Touch and release the upper right target; a check screen should appear.
5. Touch and release the green check mark; the check screen should disappear.
6. The cursor should now jump to the point of touch.
7. If the Elo Control Panel is open, close it and the Windows Control Panel.


# MACHINE PARTS



## Contents

<b>Machine Base Assembly Parts .....</b>	<b>4-2</b>
<b>Column Assembly Parts .....</b>	<b>4-7</b>
<b>Spindle Base Assembly Parts .....</b>	<b>4-9</b>
<b>Pendant Parts .....</b>	<b>4-12</b>
<b>Electrical Enclosure Parts .....</b>	<b>4-13</b>




# Machine Base Assembly Parts

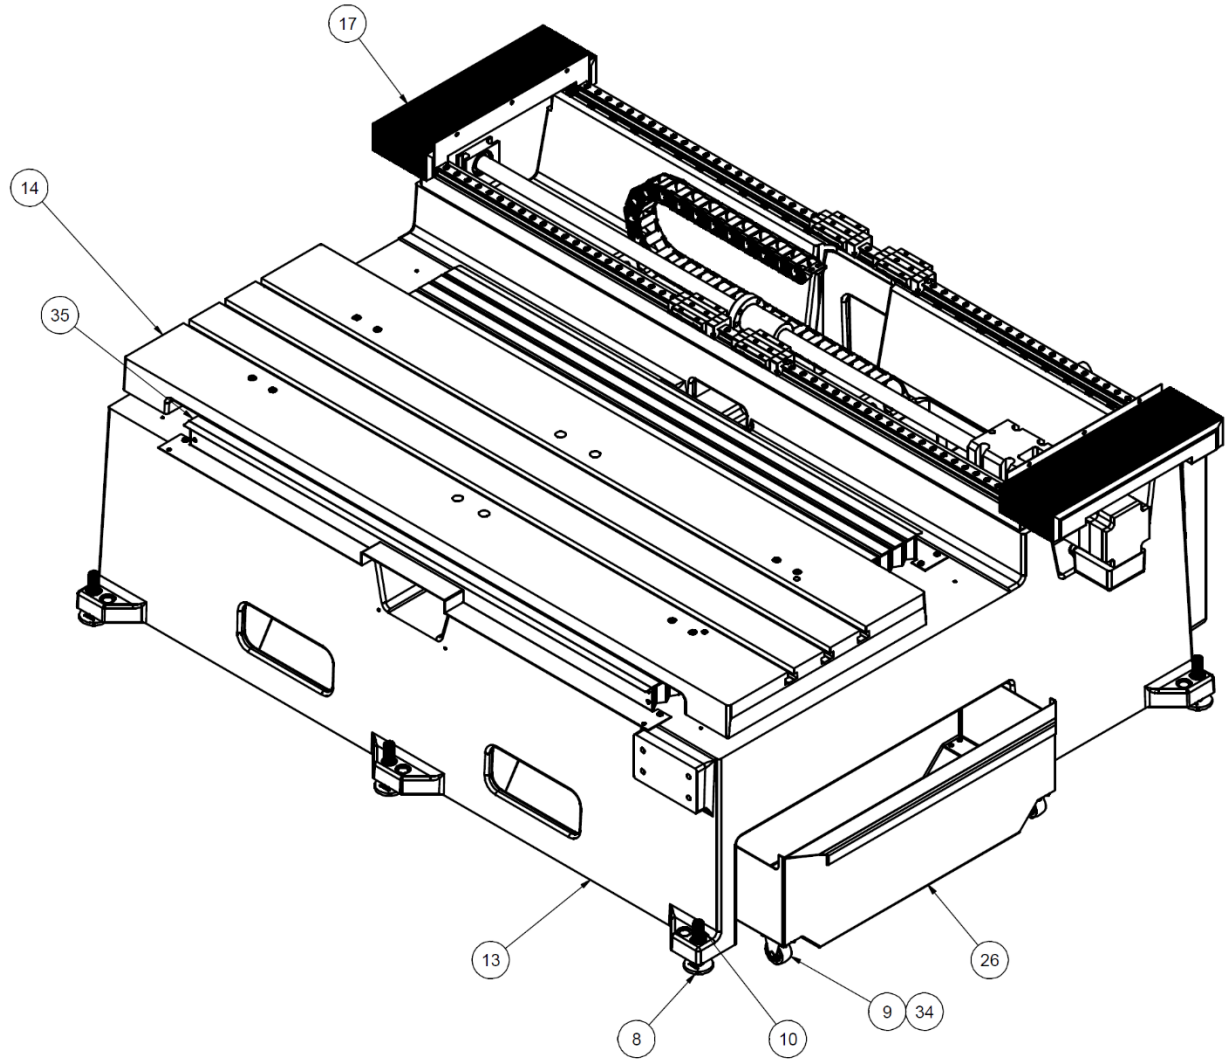


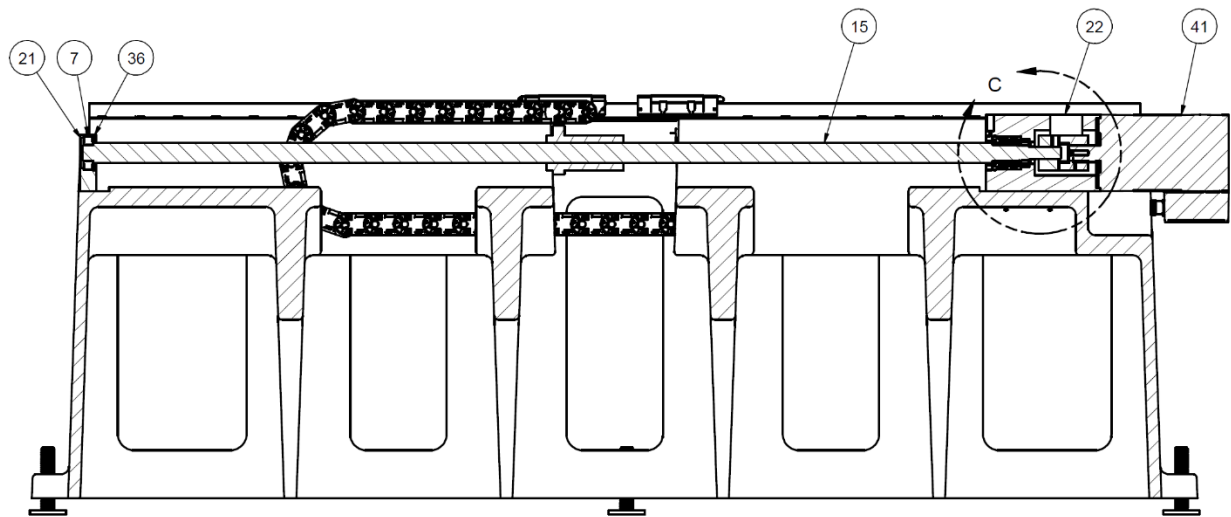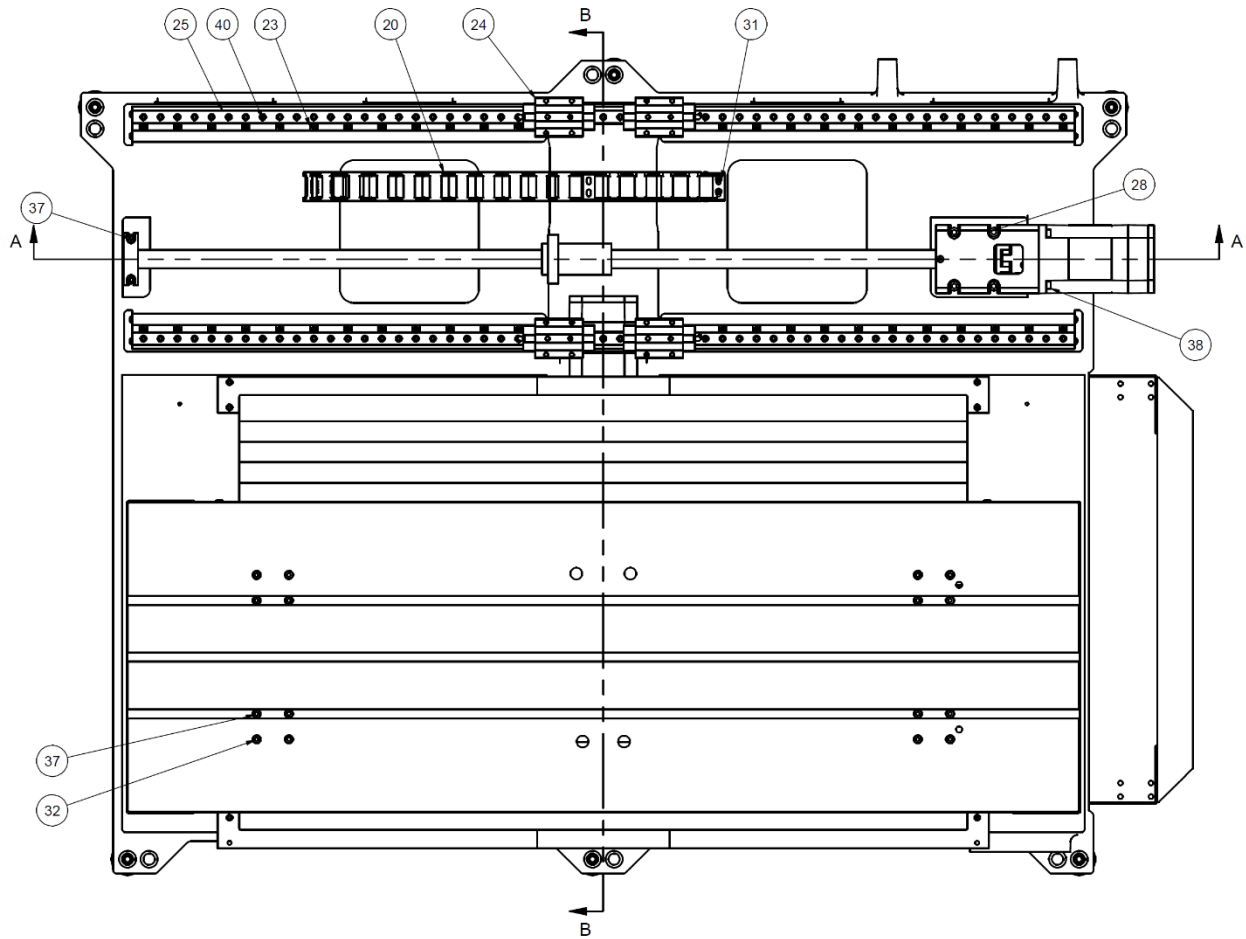


SECTION A-A  
SCALE 1 / 6

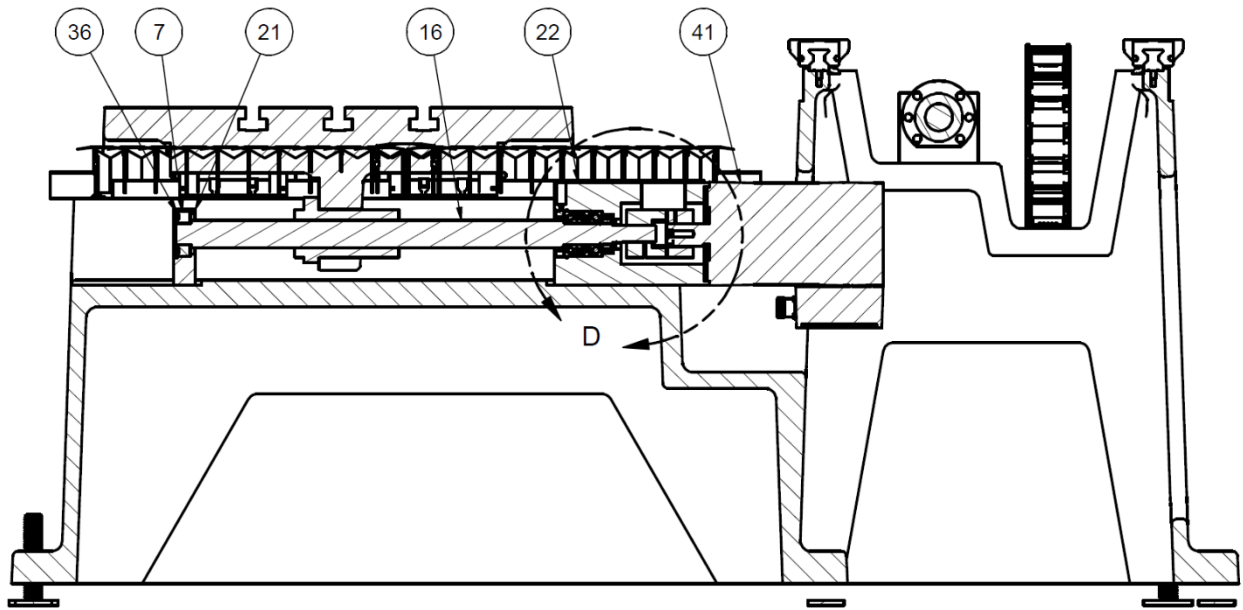


SECTION B-B  
SCALE 1 / 6

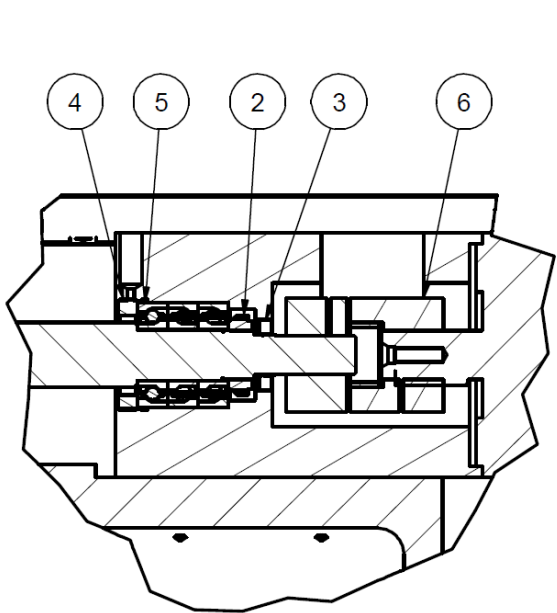

DETAIL C  
SCALE 1 / 3

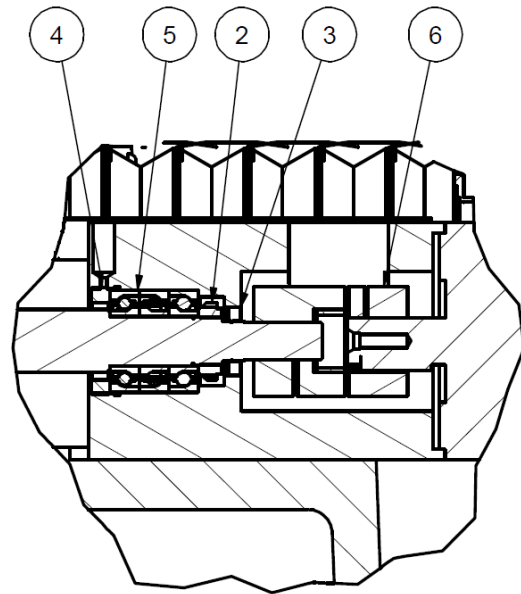



DETAIL D  
SCALE 1 / 3

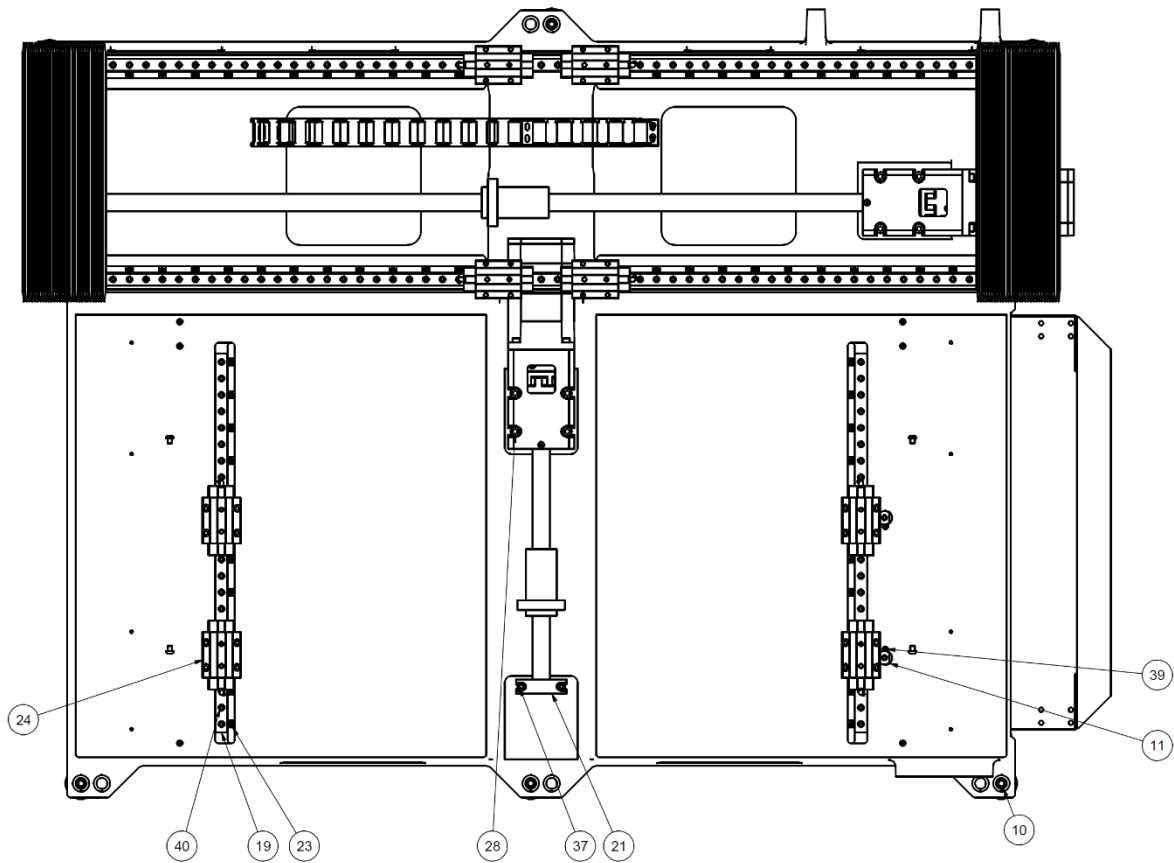

Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION
2	2	504-34-54	LOCKNUT BEARING (BH-05) F5 SERIES
3	2	504-34-53	OIL SEAL (.781 ID) F5 SERIES
4	2	504-34-15A	NUT, THRUST BEARING SPINDLE FEED F5 SERIES
5	6	504-34-52	BEARING, ANGULAR CONTACT BALL (25 MM) F5 SERIES
6	2	9001Q	COUPLING ASSEMBLY - EM79/100 FOR Z & Y AXIS
7	2	6778D	BEARING,MIDDLE-VERTICAL SHAFT HEAVY DUTY LINE BORE HEAD F88
8	7	502-1-12	LEVELING PAD
9	4	514-14-52F	CASTER BRACKET
10	7	MF-500	M20 X 100mm FLAT TIP SET SCREW
11	2	7206K	L LOCK-SURFACING CUTTERHEAD
13	1	14000	EM40 MAIN BASE (MACHINING)
14	1	14001	EM40 TABLE (MACHINING)
15	1	14002	EM40, BALLSCREW ASSY, X-AXIS
16	1	14003	EM40, BALLSCREW ASSY, Y-AXIS
17	2	14004	EM40 X-AXIS BELLOWS
35	2	14005	EM40 Y-AXIS BELLOWS
19	2	14006	RA_EM_GM_rail-RA_EM_GM_rail
20	1	14007	X-AXIS CABLE CHAIN, EM40
21	2	14008	BALLSCREW SUPPORT, EM40
22	2	14009	MOTOR SUPPORT, EM40
23	72	14010	MIGHTTEEBITE 56030 CLAMP
24	8	7314G	RA_EM_GM_slide-RA_EM_GM_slide
25	2	7314H	RA_EM_GM_rail-RA_EM_GM_rail
26	1	14011	EM40 CHIP COLLECTION TRAY
28	8	MF-510	SHCS M10 X 50mm
31	16	MF-513	BHCS M6 X 10mm
32	8	MF-508	SHCS M8 X 70mm
34	16	MF-518	HEX NUT, M6
36	2	7245E	RETAINING RING-SF
37	12	MF-506	SHCS M8 X 50mm
38	8	MF-505	SHCS M8 X 30mm
39	2	MF-501	SOCKET SHOULDER BOLT, LOW PROFILE, M5 X 12mm LG
40	156	MF-503	SHCS M6 X 25mm
41	2	9020S	MOTOR WITH BISS ENCODER-XYZ AXIS-F70
42	4	MF-515	BHCS M8 X 10mm

### Column Assembly Parts

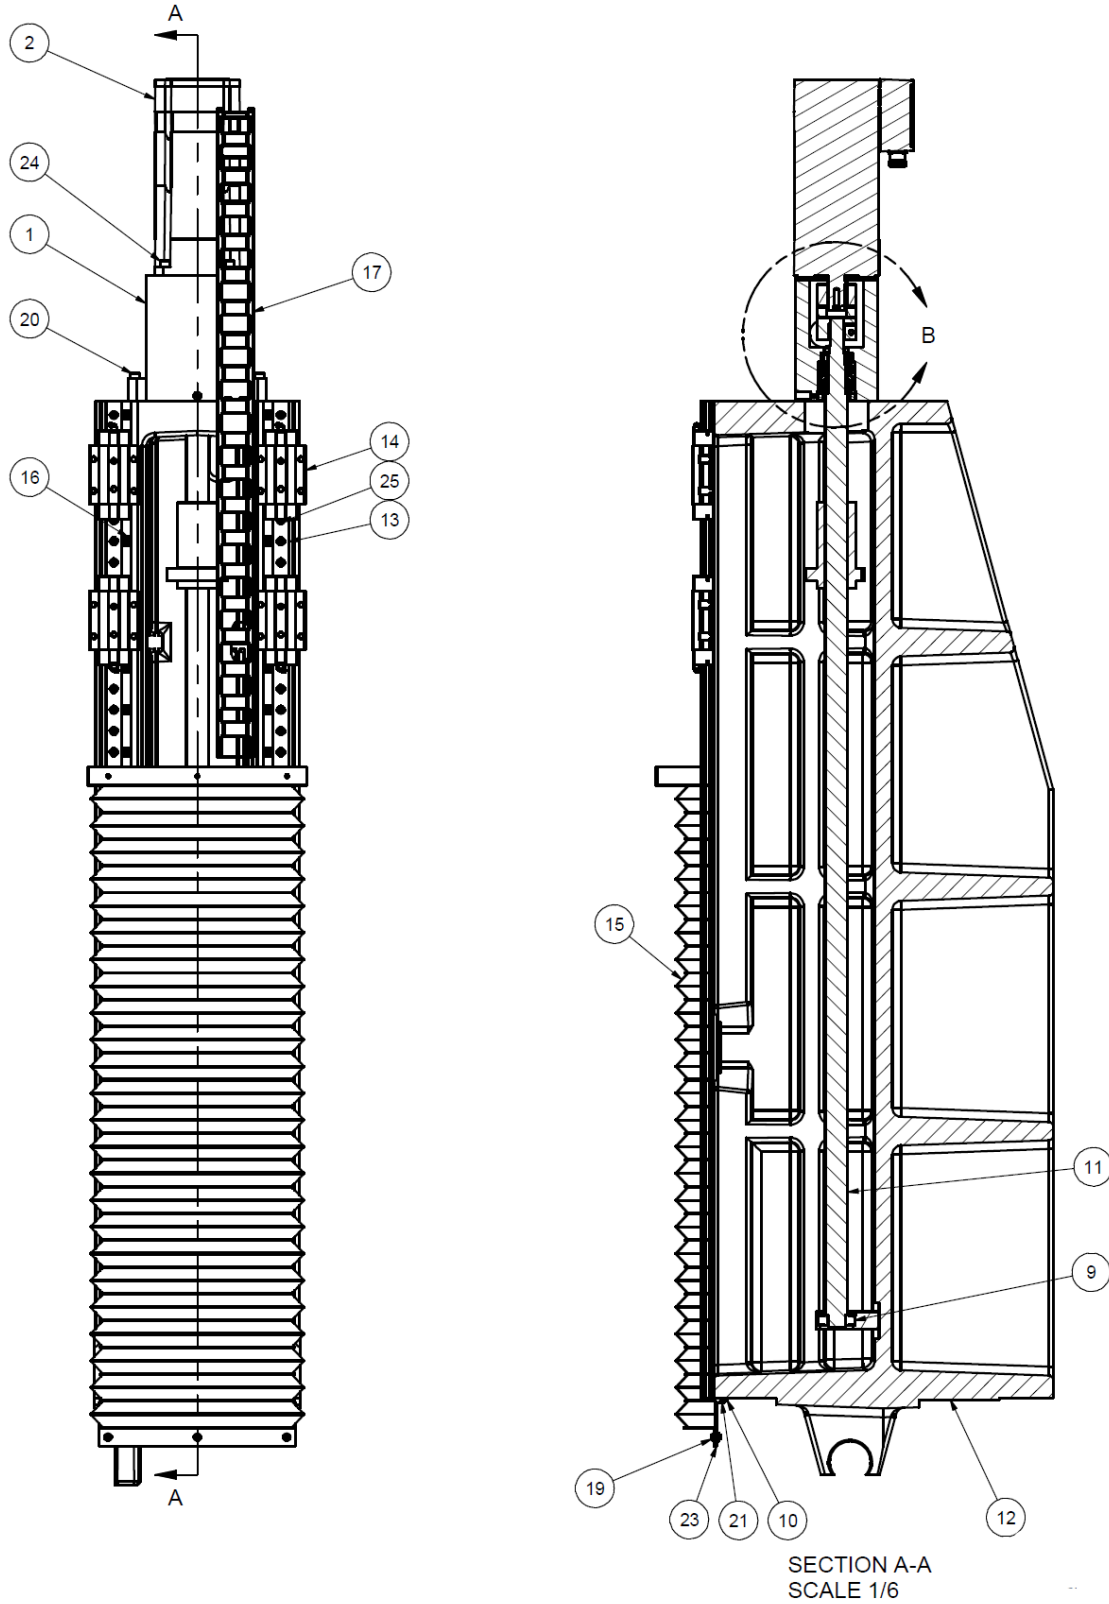


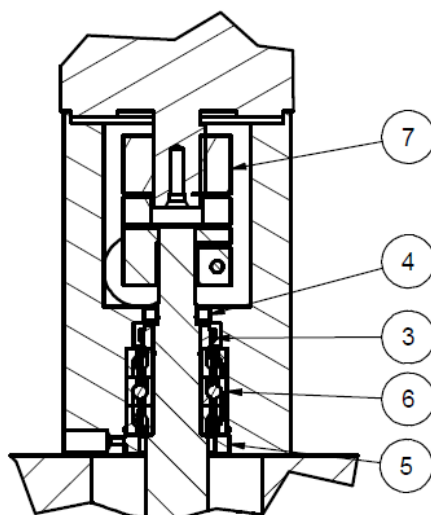



DETAIL B  
SCALE 1 / 3

Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	11008A	DIRECT DRIVE HOUSING BALLSCREW SUPPORT-X AND Y AXIS-F70
2	1	650-5-30C	MOTOR WITH BISS ENCODER-XYZ AXIS-F70
3	1	504-34-54	LOCKNUT BEARING (BH-05) F5 SERIES
4	1	504-34-53	OIL SEAL (.781 ID) F5 SERIES
5	1	504-34-15A	NUT, THRUST BEARING SPINDLE FEED F5 SERIES
6	3	504-34-52	BEARING, ANGULAR CONTACT BALL (25 MM) F5 SERIES
7	1	9001Q	COUPLING ASSEMBLY - EM79/100 FOR Z & Y AXIS
9	1	6778D	BEARING, MIDDLE-VERTICAL SHAFT HEAVY DUTY LINE BORE HEAD F88
10	2	7314C	ROD, CLAMP - LINEAR RAIL CARRIAGE
11	1	14016	EM40, BALLSCREW ASSY, Z-AXIS
12	1	14015	EM40 COLUMN (MACHINING)
13	2	7314J	RA_EM_GM_rail-RA_EM_GM_rail
14	4	7314G	RA_EM_GM_slide-RA_EM_GM_slide
15	1	14017	EM40 Y-AXIS BELLOWS
16	46	14010	MIGHTEEBITE 56030 CLAMP
17	1	14019	Z-AXIS CABLE CHAIN, EM40
19	7	MF-512	BHCS M6 X 10mm
20	6	MF-506	SHCS M8 X 50mm
21	4	MF-512	FHCS M4 X 12mm
23	1	14018	Z-AXIS BELLOWS BRACKET
24	4	MF-505	SHCS M8 X 30mm
25	94	MF-503	SHCS M6 X 25mm
26	1	14008	BALLSCREW SUPPORT, EM40

## Spindle Base Assembly Parts

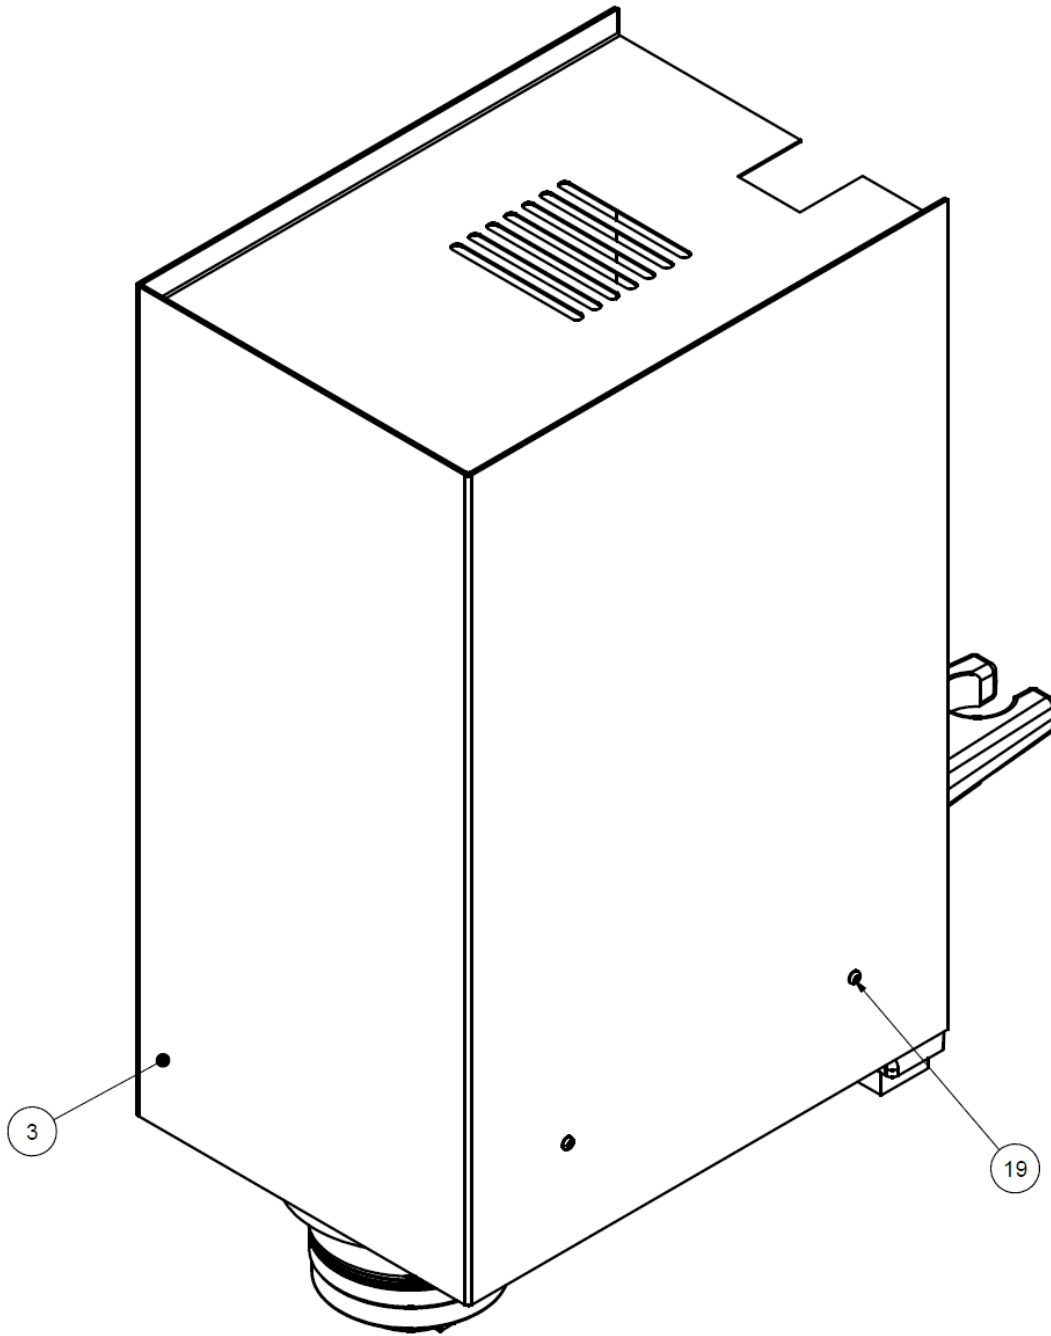




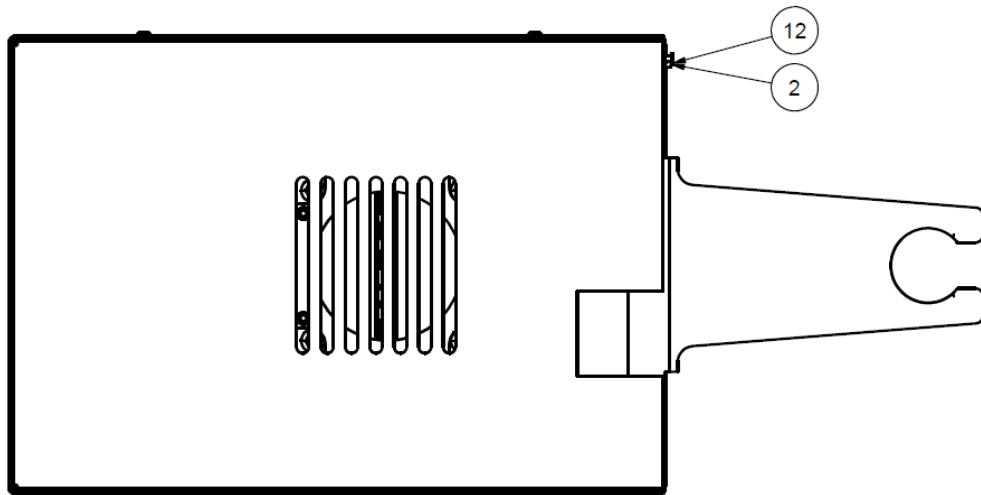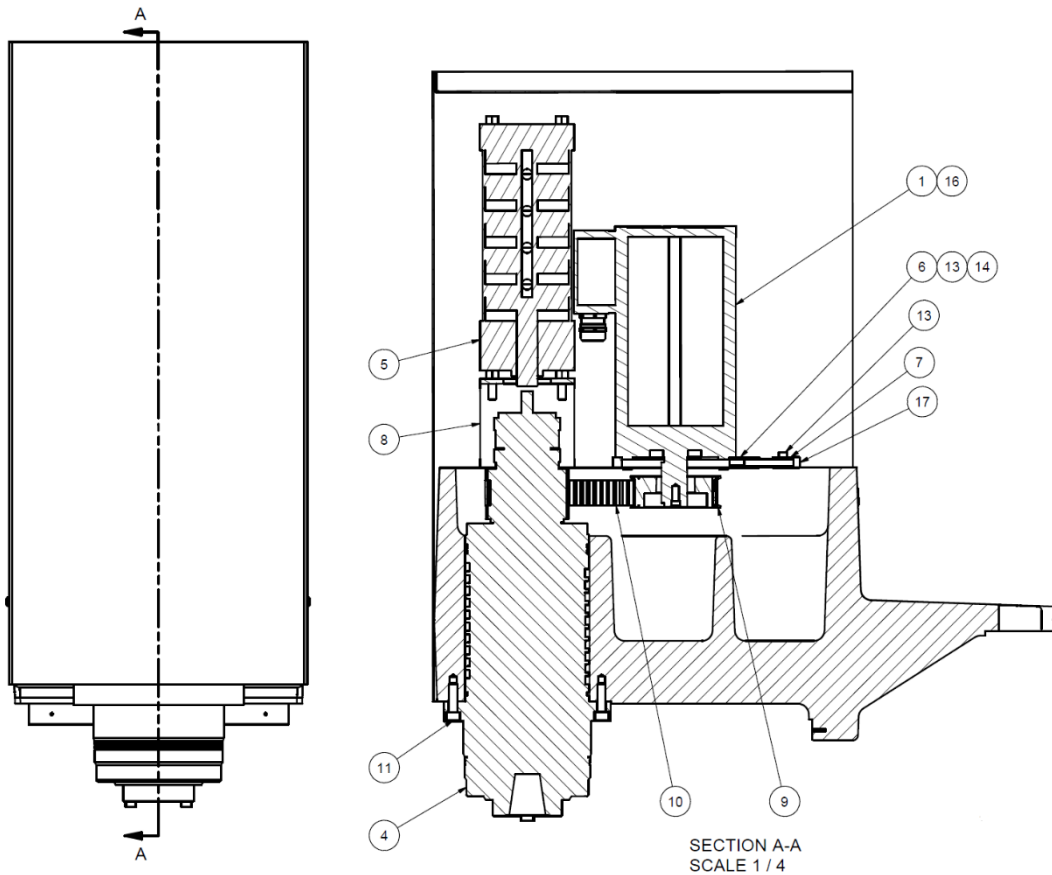


Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	650-5-20K	MOTOR WITH BISS ENCODER, SPINDLE DRIVE -F79A/F69A/F9A/F10A/SG80A/S7AD/S8AD
2	2	7314C	ROD, CLAMP - LINEAR RAIL CARRIAGE
3	1	14020	EM40 SPINDLE BASE (MACHINING)
4	1	14021	SPINDLE CARTRIDGE
5	1	14022	DRAWBAR CYLINDER, EM40
6	1	14023	EM40 SPINDLE MOTOR MOUNT PLATE
7	1	14024	BELT TENSIONER BAR
8	1	14025	DRAWBAR CYLINDER BRACKET
9	1	14027	SPINDLE DRIVE SPROCKET
10	1	14028	SPINDLE DRIVE BELT
11	8	MF-509	SHCS M10 X 35mm
12	4	MF-517	FHCS M4 X 12mm
13	6	MF-504	SHCS M6 X 35mm
14	4	MF-519	FLAT WASHER, M6
15	4	MF-503	SHCS M6 X 25mm
16	4	MF-511	SHCS M12 X 30mm
17	1	MF-507	SHCS M8 X 50mm FULL THREAD
18	1	14033	SPINDLE COVER
19	4	MF-513	BHCS M6 X 10mm



## Pendant Parts

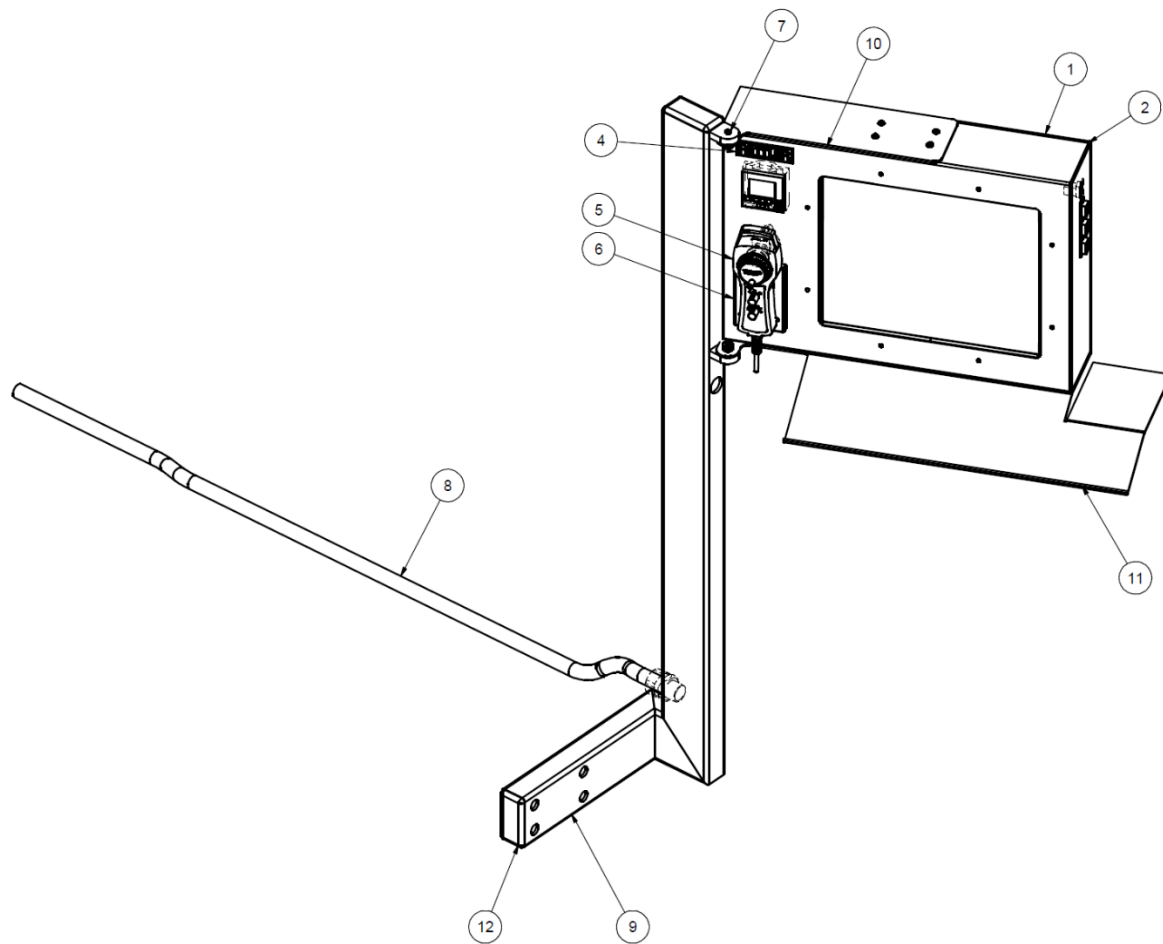

Parts List			
ITEM	QTY	PART NUMBER	DESCRIPTION
1	1	10411	COVER, PENDANT ENCLOSURE REAR - F60/F70/F100
2	1	10410	ENCLOSURE, PENDANT - F60/F70/F100
3	3	650-5-23F	I/O CONNECTOR-USB-
4	1	502-1-19E	BOLT ON NAME PLATE
5	1	4003	YUMO REMOTE HANDWHEEL
6	1	650-1-74	PENDANT HANDWHEEL MOUNT
7	2	MF-502	SOCKET SHOULDER BOLT, M10 X 6mm LG
8	1	-	SEALTITE CONDUIT, 1"
9	1	14040	EM40 PENDANT SUPPORT POST
10	1	14041	PENDANT SCREEN BRACKET, TOP
11	1	14042	PENDANT KEYBOARD TRAY, W/ PASS
12	2	6200J	PLUG-TUBING- PENDANT SWING ARM F80 SERIES
18	1	9252	
20	4	MF-518	HEX NUT, M6
21	4	MF-514	BHCS, M6 X 16mm
23	14	MF-516	BHCS, M4 X 8mm
24	1	502-12-7K	1 AXIS GAGING DISPLAY-DIGITAL RUNOUT GAGE
25	6	MF-513	BHCS, M6 X 10mm

## Electrical Enclosure Parts

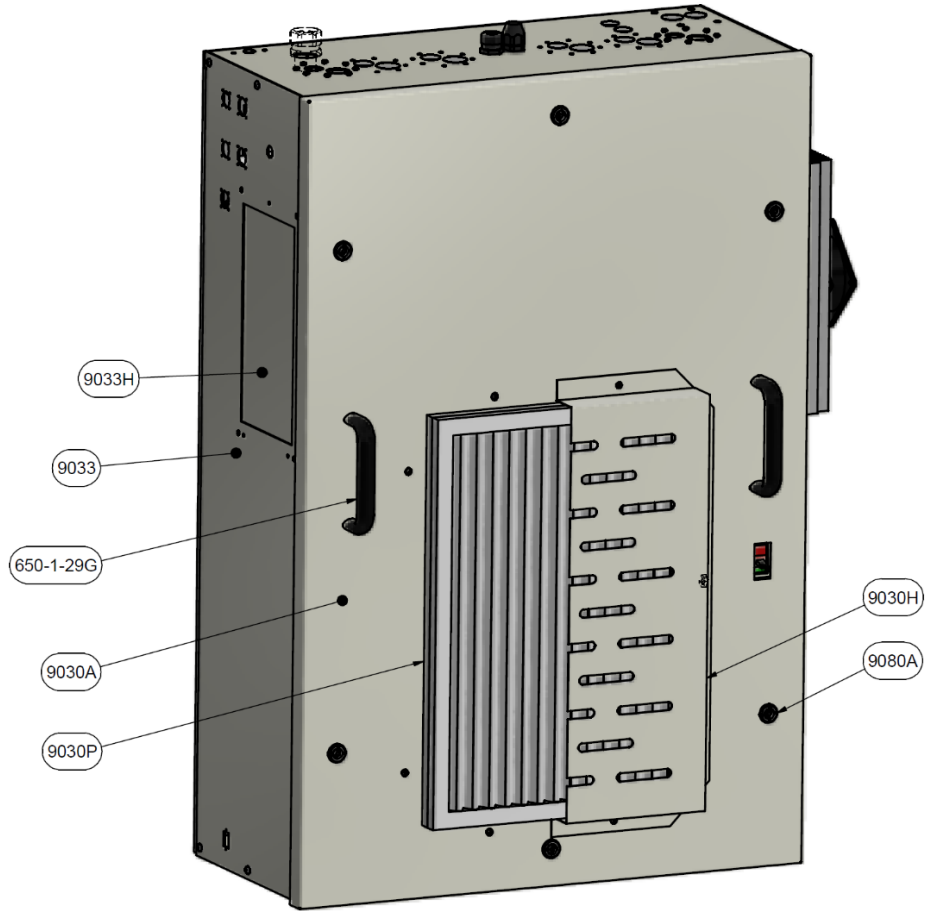

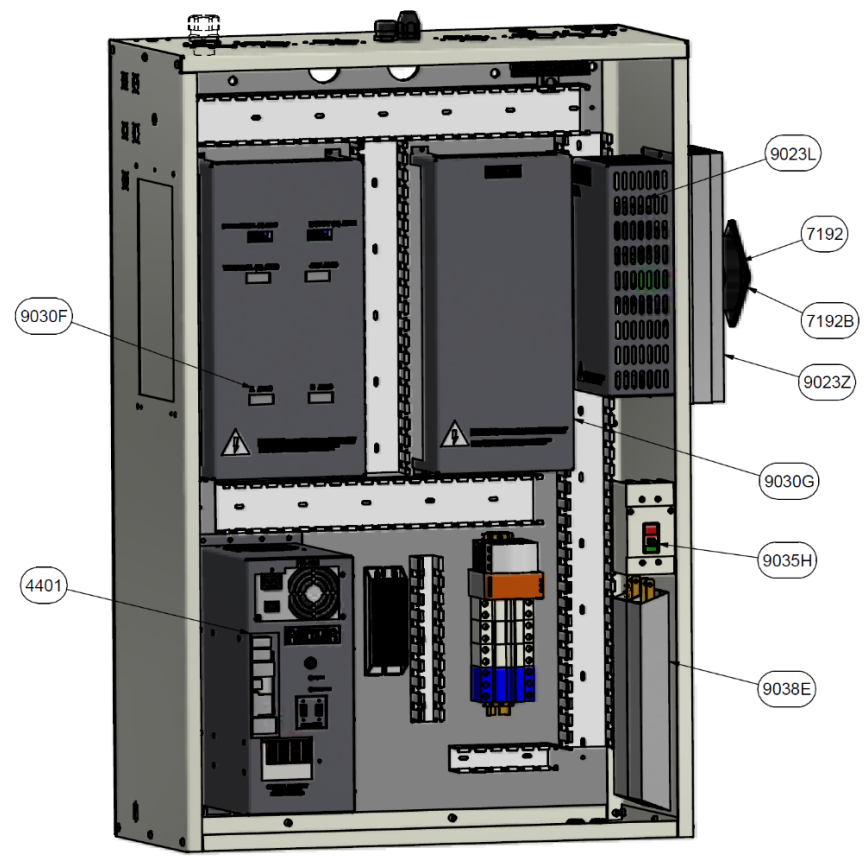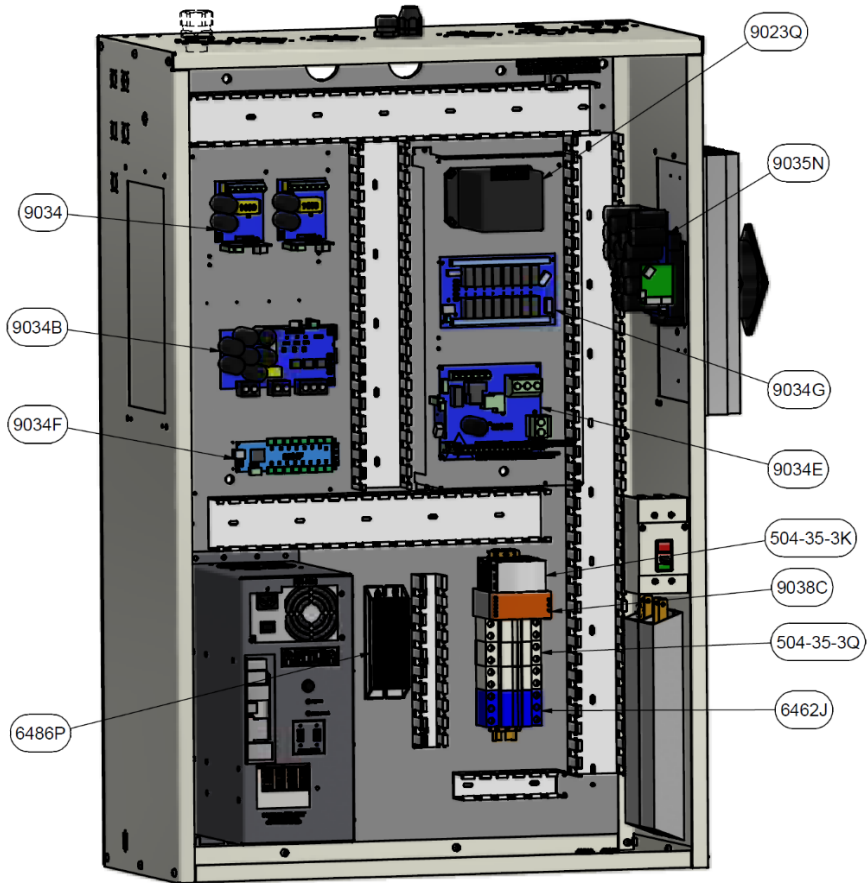

# SDS

The Safety Data Sheets list shown in this section are the substances and materials that an operator is most likely to come in contact with while using this machine.

Other substances and materials are used in the manufacture, testing, and shipping of this machine. A complete list of the Safety Data Sheets of substances and materials used by Rottler Manufacturing during manufacturing, testing, and shipping is located on the Manual flash drive shipped with the machine. Safety Data Sheets are also located on the company web site: <http://www.rottlermfg.com/documentation.php>

- 1. Mobil Vactra Oil #2**
- 2. Mobil Polyrex EP2**

Product Name: Mobil Vactra Oil No. 2

Revision Date: 30 Aug 2018

Page 1 of 8



## SAFETY DATA SHEET

### SECTION 1 PRODUCT AND COMPANY IDENTIFICATION

#### PRODUCT

**Product Name:** MOBIL VACTRA OIL NO. 2  
**Product Description:** Base Oil and Additives  
**Product Code:** 201560901015, 600494-85  
**Intended Use:** Lubricant

#### COMPANY IDENTIFICATION

**Supplier:** East Coast Lubes Pty Ltd (Queensland and Northern Territory)  
 A.B.N. 37 117 203 611  
 Cnr North and Mort Streets  
 Toowoomba, Queensland 4350, Australia

**24 Hour Emergency Telephone** 1300 131 001  
**Supplier General Contact** 1800 069 019

**Supplier:** Southern Cross Lubes (Victoria and Tasmania, New South Wales and Australian Capital Territory)  
 58-66 Ajax Road  
 Altona, Victoria 3018, Australia

**24 Hour Emergency Telephone** 1300 131 001  
**Product Technical Information** 1300 466 245  
**Supplier General Contact** 1300 552 861

**Supplier:** Perkal Pty Ltd Trading as Statewide Oil (Western Australia)  
 A.B.N. 43 009 283 363  
 14 Beete Street  
 Welshpool, Western Australia 6106 Australia

**24 Hour Emergency Telephone** (8:00am to 4:30pm Mon to Fri) 1300 919 904  
**Product Technical Information** (08) 9350 6777  
**Supplier General Contact** (08) 9350 6777

**Supplier:** Perkal Pty Ltd Trading as Statewide Oil (South Australia)  
 A.B.N. 43 009 283 363  
 6-10 Streiff Rd  
 Wingfield, South Australia 5013 Australia

**24 Hour Emergency Telephone** (8:00am to 4:30pm Mon to Fri) 1300 919 904  
**Product Technical Information** (08) 8359 8995  
**Supplier General Contact** (08) 8359 8995

Product Name: Mobil Vactra Oil No. 2

Revision Date: 30 Aug 2018

Page 2 of 8



## SECTION 2 HAZARDS IDENTIFICATION

This material is not hazardous according to regulatory guidelines (see (M)SDS Section 15).

**Contains:** PHOSPHORIC ACID ESTERS, AMINE SALT May produce an allergic reaction.

**Other Hazard Information:**

**Physical / Chemical Hazards:**

No significant hazards.

**Health Hazards:**

High-pressure injection under skin may cause serious damage. Excessive exposure may result in eye, skin, or respiratory irritation.

**Environmental Hazards:**

No significant hazards.

**NOTE:** This material should not be used for any other purpose than the intended use in Section 1 without expert advice. Health studies have shown that chemical exposure may cause potential human health risks which may vary from person to person.

## SECTION 3 COMPOSITION / INFORMATION ON INGREDIENTS

This material is defined as a mixture.

**Reportable Hazardous Substance(s) or Complex Substance(s)**

Name	CAS#	Concentration	GHS Hazard Codes
2,6-DI-BUTYL-P-CRESOL	128-37-0	0.1 - < 1%	H400 (M factor 1) H410 (M factor 1)
PHOSPHORIC ACID ESTERS, AMINE SALT	Confidential	0.1 - < 1%	H227, H302, H317, H318, H401, H411

\* All concentrations are percent by weight unless ingredient is a gas. Gas concentrations are in percent by volume. Other ingredients determined not to be hazardous up to 100%.

## SECTION 4 FIRST AID MEASURES

**INHALATION**

Remove from further exposure. For those providing assistance, avoid exposure to yourself or others. Use adequate respiratory protection. If respiratory irritation, dizziness, nausea, or unconsciousness occurs, seek immediate medical assistance. If breathing has stopped, assist ventilation with a mechanical device or use mouth-to-mouth resuscitation.

**SKIN CONTACT**

Wash contact areas with soap and water. If product is injected into or under the skin, or into any part of the body, regardless of the appearance of the wound or its size, the individual should be evaluated immediately a physician as a surgical emergency. Even though initial symptoms from high pressure injection may be minimal or absent, early surgical treatment within the first few hours may significantly reduce the ultimate extent of injury.

**EYE CONTACT**

Flush thoroughly with water. If irritation occurs, get medical assistance.

**INGESTION**

First aid is normally not required. Seek medical attention if discomfort occurs.

**NOTE TO PHYSICIAN**

None



Product Name: Mobil Vactra Oil No. 2

Revision Date: 30 Aug 2018

Page 3 of 8

**SECTION 5 FIRE FIGHTING MEASURES****EXTINGUISHING MEDIA**

**Appropriate Extinguishing Media:** Use water fog, foam, dry chemical or carbon dioxide (CO<sub>2</sub>) to extinguish flames.

**Inappropriate Extinguishing Media:** Straight streams of water

**FIRE FIGHTING**

**Fire Fighting Instructions:** Evacuate area. Prevent run-off from fire control or dilution from entering streams, sewers or drinking water supply. Fire-fighters should use standard protective equipment and in enclosed spaces, self-contained breathing apparatus (SCBA). Use water spray to cool fire exposed surfaces and to protect personnel.

**Hazardous Combustion Products:** Aldehydes, Incomplete combustion products, Oxides of carbon, Smoke, Fume, Sulphur oxides

**FLAMMABILITY PROPERTIES**

**Flash Point [Method]:** >205°C (401°F) [ASTM D-92]

**Flammable Limits (Approximate volume % in air):** LEL: 0.9 UEL: 7.0

**Autoignition Temperature:** N/D

**SECTION 6 ACCIDENTAL RELEASE MEASURES****NOTIFICATION PROCEDURES**

In the event of a spill or accidental release, notify relevant authorities in accordance with all applicable regulations.

**PROTECTIVE MEASURES**

Avoid contact with spilled material. See Section 5 for firefighting information. See the Hazard Identification Section for Significant Hazards. See Section 4 for First Aid Advice. See Section 8 for advice on the minimum requirements for personal protective equipment. Additional protective measures may be necessary, depending on the specific circumstances and/or the expert judgment of the emergency responders.

For emergency responders: Respiratory protection: respiratory protection will be necessary only in special cases, e.g., formation of mists. Half-face or full-face respirator with filter(s) for dust/organic vapor or Self Contained Breathing Apparatus (SCBA) can be used depending on the size of spill and potential level of exposure. If the exposure cannot be completely characterized or an oxygen deficient atmosphere is possible or anticipated, SCBA is recommended. Work gloves that are resistant to hydrocarbons are recommended. Gloves made of polyvinyl acetate (PVA) are not water-resistant and are not suitable for emergency use. Chemical goggles are recommended if splashes or contact with eyes is possible. Small spills: normal antistatic work clothes are usually adequate. Large spills: full body suit of chemical resistant, antistatic material is recommended.

**SPILL MANAGEMENT**

**Land Spill:** Stop leak if you can do so without risk. Recover by pumping or with suitable absorbent.

**Water Spill:** Stop leak if you can do so without risk. Confine the spill immediately with booms. Warn other shipping. Remove from the surface by skimming or with suitable absorbents. Seek the advice of a specialist before using dispersants.

Water spill and land spill recommendations are based on the most likely spill scenario for this material; however, geographic conditions, wind, temperature, (and in the case of a water spill) wave and current direction and speed may greatly influence the appropriate action to be taken. For this reason, local experts should be consulted. Note: Local regulations may prescribe or limit action to be taken.

**ENVIRONMENTAL PRECAUTIONS**

Large Spills: Dyke far ahead of liquid spill for later recovery and disposal. Prevent entry into waterways, sewers, basements or confined areas.

Product Name: Mobil Vactra Oil No. 2

Revision Date: 30 Aug 2018

Page 4 of 8



## SECTION 7 HANDLING AND STORAGE

### HANDLING

Prevent small spills and leakage to avoid slip hazard. Material can accumulate static charges which may cause an electrical spark (ignition source). When the material is handled in bulk, an electrical spark could ignite any flammable vapors from liquids or residues that may be present (e.g., during switch-loading operations). Use proper bonding and/or earthing procedures. However, bonding and earthing may not eliminate the hazard from static accumulation. Consult local applicable standards for guidance. Additional references include American Petroleum Institute 2003 (Protection Against Ignitions Arising out of Static, Lightning and Stray Currents) or National Fire Protection Agency 77 (Recommended Practice on Static Electricity) or CENELEC CLC/TR 50404 (Electrostatics - Code of practice for the avoidance of hazards due to static electricity).

**Static Accumulator:** This material is a static accumulator.

### STORAGE

The type of container used to store the material may affect static accumulation and dissipation. Do not store in open or unlabelled containers. Keep away from incompatible materials.

Material is defined under the National Standard [NOHSC:1015] Storage and Handling of Workplace Dangerous Goods.

## SECTION 8 EXPOSURE CONTROLS / PERSONAL PROTECTION

### EXPOSURE LIMIT VALUES

Exposure limits/standards (Note: Exposure limits are not additive)

Substance Name	Form	Limit/Standard			Note	Source
2,6-DI-TERT-BUTYL-P-CRESOL		TWA	10 mg/m <sup>3</sup>			Australia OELs
2,6-DI-TERT-BUTYL-P-CRESOL	Inhalable fraction and vapour	TWA	2 mg/m <sup>3</sup>			ACGIH

Exposure limits/standards for materials that can be formed when handling this product:

NOTE: Limits/standards shown for guidance only. Follow applicable regulations.

### Biological limits

No biological limits allocated.

### ENGINEERING CONTROLS

The level of protection and types of controls necessary will vary depending upon potential exposure conditions. Control measures to consider:

No special requirements under ordinary conditions of use and with adequate ventilation.

### PERSONAL PROTECTION

Personal protective equipment selections vary based on potential exposure conditions such as applications, handling practices, concentration and ventilation. Information on the selection of protective equipment for use with this material, as provided below, is based upon intended, normal usage.

**Respiratory Protection:** If engineering controls do not maintain airborne contaminant concentrations at a level which is adequate to protect worker health, an approved respirator may be appropriate. Respirator selection, use, and maintenance must be in accordance with regulatory requirements, if applicable. Types of respirators to be considered for this material include:

Particulate

No special requirements under ordinary conditions of use and with adequate ventilation.

For high airborne concentrations, use an approved supplied-air respirator, operated in positive pressure mode. Supplied air respirators with an escape bottle may be appropriate when oxygen levels are inadequate, gas/vapour warning properties are poor, or if air purifying filter capacity/rating may be exceeded.

**Hand Protection:** Any specific glove information provided is based on published literature and glove manufacturer data. Glove suitability and breakthrough time will differ depending on the specific use conditions. Contact the glove manufacturer for specific advice on glove selection and breakthrough times for your use conditions. Inspect and replace worn or damaged gloves. The types of gloves to be considered for this material include:

Nitrile, Viton

No protection is ordinarily required under normal conditions of use.

Product Name: Mobil Vactra Oil No. 2

Revision Date: 30 Aug 2018

Page 5 of 8



**Eye Protection:** If contact is likely, safety glasses with side shields are recommended.

**Skin and Body Protection:** Any specific clothing information provided is based on published literature or manufacturer data. The types of clothing to be considered for this material include:

No skin protection is ordinarily required under normal conditions of use. In accordance with good industrial hygiene practices, precautions should be taken to avoid skin contact.

**Specific Hygiene Measures:** Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. Discard contaminated clothing and footwear that cannot be cleaned. Practise good housekeeping.

#### ENVIRONMENTAL CONTROLS

Comply with applicable environmental regulations limiting discharge to air, water and soil. Protect the environment by applying appropriate control measures to prevent or limit emissions.

### SECTION 9 PHYSICAL AND CHEMICAL PROPERTIES

**Note:** Physical and chemical properties are provided for safety, health and environmental considerations only and may not fully represent product specifications. Contact the Supplier for additional information.

#### GENERAL INFORMATION

**Physical State:** Liquid  
**Colour:** Amber  
**Odour:** Characteristic  
**Odour Threshold:** N/D

#### IMPORTANT HEALTH, SAFETY, AND ENVIRONMENTAL INFORMATION

<b>Relative Density (at 15 °C):</b>	0.883
<b>Flammability (Solid, Gas):</b>	N/A
<b>Flash Point [Method]:</b>	>205°C (401°F) [ASTM D-92]
<b>Flammable Limits (Approximate volume % in air):</b>	LEL: 0.9 UEL: 7.0
<b>Autoignition Temperature:</b>	N/D
<b>Boiling Point / Range:</b>	> 316°C (600°F)
<b>Decomposition Temperature:</b>	N/D
<b>Vapour Density (Air = 1):</b>	> 2 at 101 kPa
<b>Vapour Pressure:</b>	< 0.013 kPa (0.1 mm Hg) at 20 °C
<b>Evaporation Rate (n-butyl acetate = 1):</b>	N/D
<b>pH:</b>	N/A
<b>Log Pow (n-Octanol/Water Partition Coefficient):</b>	> 3.5
<b>Solubility in Water:</b>	Negligible
<b>Viscosity:</b>	68 cSt (68 mm <sup>2</sup> /sec) at 40 °C   8.6 cSt (8.6 mm <sup>2</sup> /sec) at 100°C
<b>Oxidizing Properties:</b>	See Hazards Identification Section.

#### OTHER INFORMATION

<b>Freezing Point:</b>	N/D
<b>Melting Point:</b>	N/A
<b>Pour Point:</b>	-6°C (21°F)
<b>DMSO Extract (mineral oil only), IP-346:</b>	< 3 %wt

### SECTION 10 STABILITY AND REACTIVITY

**STABILITY:** Material is stable under normal conditions.

**CONDITIONS TO AVOID:** Excessive heat. High energy sources of ignition.

**INCOMPATIBLE MATERIALS:** Strong oxidisers

**HAZARDOUS DECOMPOSITION PRODUCTS:** Material does not decompose at ambient temperatures.

**POSSIBILITY OF HAZARDOUS REACTIONS:** Hazardous polymerization will not occur.

Product Name: Mobil Vactra Oil No. 2

Revision Date: 30 Aug 2018

Page 6 of 8



<b>SECTION 11</b>	<b>TOXICOLOGICAL INFORMATION</b>
-------------------	----------------------------------

**INFORMATION ON TOXICOLOGICAL EFFECTS**

<b>Hazard Class</b>	<b>Conclusion / Remarks</b>
<b>Inhalation</b>	
Acute Toxicity: No end point data for material	Minimally Toxic. Based on assessment of the components
Irritation: No end point data for material	Negligible hazard at ambient/normal handling temperatures
<b>Ingestion</b>	
Acute Toxicity: No end point data for material	Minimally Toxic. Based on assessment of the components.
<b>Skin</b>	
Acute Toxicity: No end point data for material	Minimally Toxic. Based on assessment of the components
Skin Corrosion/Irritation: No end point data for material	Negligible irritation to skin at ambient temperatures. Based on assessment of the components
<b>Eye</b>	
Serious Eye Damage/Irritation: No end point data for material	May cause mild, short-lasting discomfort to eyes. Based on assessment of the components.
<b>Sensitization</b>	
Respiratory Sensitization: No end point data for material.	Not expected to be a respiratory sensitizer.
Skin Sensitization: No end point data for material.	Not expected to be a skin sensitizer. Based on assessment of the components.
<b>Aspiration:</b> Data available.	Not expected to be an aspiration hazard. Based on physicochemical properties of the material.
<b>Germ Cell Mutagenicity:</b> No end point data for material.	Not expected to be a germ cell mutagen. Based on assessment of the components.
<b>Carcinogenicity:</b> No end point data for material.	Not expected to cause cancer. Based on assessment of the components.
<b>Reproductive Toxicity:</b> No end point data for material.	Not expected to be a reproductive toxicant. Based on assessment of the components.
<b>Lactation:</b> No end point data for material.	Not expected to cause harm to breast-fed children.
<b>Specific Target Organ Toxicity (STOT)</b>	
Single Exposure: No end point data for material.	Not expected to cause organ damage from a single exposure.
Repeated Exposure: No end point data for material.	Not expected to cause organ damage from prolonged or repeated exposure. Based on assessment of the components.

**OTHER INFORMATION****For the product itself:**

Component concentrations in this formulation would not be expected to cause skin sensitization, based on tests of the components, this formulation, or similar formulations.

**Contains:**

Base oil severely refined: Not carcinogenic in animal studies. Representative material passes IP-346, Modified Ames test, and/or other screening tests. Dermal and inhalation studies showed minimal effects; lung non-specific infiltration of immune cells, oil deposition and minimal granuloma formation. Not sensitizing in test animals.

**IARC Classification:**

The following ingredients are cited on the lists below: None.

--REGULATORY LISTS SEARCHED--

1 = IARC 1                      2 = IARC 2A                      3 = IARC 2B

Product Name: Mobil Vactra Oil No. 2

Revision Date: 30 Aug 2018

Page 7 of 8

**SECTION 12 ECOLOGICAL INFORMATION**

The information given is based on data for the material, components of the material, or for similar materials, through the application of bridging principals.

**ECOTOXICITY**

Material -- Not expected to be harmful to aquatic organisms.

**MOBILITY**

Base oil component -- Low solubility and floats and is expected to migrate from water to the land.  
Expected to partition to sediment and wastewater solids.

**PERSISTENCE AND DEGRADABILITY****Biodegradation:**

Base oil component -- Expected to be inherently biodegradable

**BIOACCUMULATION POTENTIAL**

Base oil component -- Has the potential to bioaccumulate, however metabolism or physical properties may reduce the bioconcentration or limit bioavailability.

**SECTION 13 DISPOSAL CONSIDERATIONS**

Disposal recommendations based on material as supplied. Disposal must be in accordance with current applicable laws and regulations, and material characteristics at time of disposal.

**DISPOSAL RECOMMENDATIONS**

Product is suitable for burning in an enclosed controlled burner for fuel value or disposal by supervised incineration at very high temperatures to prevent formation of undesirable combustion products. Protect the environment. Dispose of used oil at designated sites. Minimize skin contact. Do not mix used oils with solvents, brake fluids or coolants.

**Empty Container Warning** Empty Container Warning (where applicable): Empty containers may contain residue and can be dangerous. Do not attempt to refill or clean containers without proper instructions. Empty drums should be completely drained and safely stored until appropriately reconditioned or disposed. Empty containers should be taken for recycling, recovery, or disposal through suitably qualified or licensed contractor and in accordance with governmental regulations. DO NOT PRESSURISE, CUT, WELD, BRAZE, SOLDER, DRILL, GRIND, OR EXPOSE SUCH CONTAINERS TO HEAT, FLAME, SPARKS, STATIC ELECTRICITY, OR OTHER SOURCES OF IGNITION. THEY MAY EXPLODE AND CAUSE INJURY OR DEATH.

**SECTION 14 TRANSPORT INFORMATION**

**LAND (ADG):** Not Regulated for Land Transport

**SEA (IMDG):** Not Regulated for Sea Transport according to IMDG-Code  
**Marine Pollutant:** No

**AIR (IATA):** Not Regulated for Air Transport

**SECTION 15 REGULATORY INFORMATION**

This material is not considered hazardous according to Australia Model Work Health and Safety Regulations.

Product is not regulated according to Australian Dangerous Goods Code.

No Poison Schedule number allocated by the Standard for the Uniform Scheduling of Medicines and Poisons (SUSMP) established under the Therapeutic Goods Act.

AS1940 COMBUSTIBLE CLASS: C2

**REGULATORY STATUS AND APPLICABLE LAWS AND REGULATIONS**

Listed or exempt from listing/notification on the following chemical inventories (May contain substance(s) subject to notification to the EPA Active TSCA inventory prior to import to USA): AICS, DSL, ENCS, IECSC, KECI, PICCS, TCSI, TSCA

Product Name: Mobil Vactra Oil No. 2

Revision Date: 30 Aug 2018

Page 8 of 8

**SECTION 16****OTHER INFORMATION****KEY TO ABBREVIATIONS AND ACRONYMS:**

N/D = Not determined, N/A = Not applicable, STEL = Short-Term Exposure Limit, TWA = Time-Weighted Average

**KEY TO THE H-CODES CONTAINED IN SECTION 3 OF THIS DOCUMENT (for information only):**

H227: Combustible liquid; Flammable Liquid, Cat 4

H302: Harmful if swallowed; Acute Tox Oral, Cat 4

H317: May cause allergic skin reaction; Skin Sensitization, Cat 1

H318: Causes serious eye damage; Serious Eye Damage/Irr, Cat 1

H400: Very toxic to aquatic life; Acute Env Tox, Cat 1

H401: Toxic to aquatic life; Acute Env Tox, Cat 2

H410: Very toxic to aquatic life with long lasting effects; Chronic Env Tox, Cat 1

H411: Toxic to aquatic life with long lasting effects; Chronic Env Tox, Cat 2

**THIS SAFETY DATA SHEET CONTAINS THE FOLLOWING REVISIONS:**

Southern Cross Lubes (Victoria and Tasmania): Section 01: Supplier Mailing Address information was deleted.

Southern Cross Lubes (Victoria and Tasmania, New South Wales and Australian Capital Territory): Section 01:

Supplier Mailing Address information was added.

Section 11 Acute Toxicity data - Header information was deleted.

Section 11 Substance Name - Header information was deleted.

Section 11 Substance Toxicity table - Header information was deleted.

Section 11 Substance Toxicology table information was deleted.

Section 12: information was modified.

The information and recommendations contained herein are, to the best of ExxonMobil's knowledge and belief, accurate and reliable as of the date issued. You can contact ExxonMobil to ensure that this document is the most current available from ExxonMobil. The information and recommendations are offered for the user's consideration and examination. It is the user's responsibility to satisfy itself that the product is suitable for the intended use. If buyer repackages this product, it is the user's responsibility to ensure proper health, safety and other necessary information is included with and/or on the container.

Appropriate warnings and safe-handling procedures should be provided to handlers and users. Alteration of this document is strictly prohibited. Except to the extent required by law, republication, or retransmission of this document, in whole or in part, is not permitted. The term, "ExxonMobil" is used for convenience, and may include any one or more of ExxonMobil Chemical Company, Exxon Mobil Corporation, or any affiliates in which they directly or indirectly hold any interest.

DGN: 7053124DAU (1014681)

Prepared by: Exxon Mobil Corporation  
EMBSI, Clinton NJ USA

Contact Point: See Section 1 for Local Contact number

**End of (M)SDS**

Product Name: Mobil Polyrex EP 2  
 Revision Date: 25 Jul 2018  
 Page 1 of 7



## SAFETY DATA SHEET

### SECTION 1 PRODUCT AND COMPANY IDENTIFICATION

#### PRODUCT

**Product Name:** MOBIL POLYREX EP 2  
**Product Description:** Base Oil and Additives  
**Product Code:** 2015A020G020, 641696-00, 97Y279  
**Intended Use:** Grease

#### COMPANY IDENTIFICATION

**Supplier:** EXXON MOBIL CORPORATION  
 22777 Springwoods Village Parkway  
 Spring, TX 77389, USA

**24 Hour Health Emergency** 609-737-441  
**Transportation Emergency Phone** 800-424-9300 or 703-527-3887 CHEMTREC  
**Product Technical Information** 800-662-4525  
**MSDS Internet Address** www.exxon.com, www.mobil.com

### SECTION 2 HAZARDS IDENTIFICATION

This material is not hazardous according to regulatory guidelines (see (M)SDS Section 15).

#### Other hazard information:

**HAZARD NOT OTHERWISE CLASSIFIED (HNOC):** None as defined under 29 CFR 1910.1200.

#### PHYSICAL / CHEMICAL HAZARDS

No significant hazards.

#### HEALTH HAZARDS

High-pressure injection under skin may cause serious damage. Excessive exposure may result in eye, skin, or respiratory irritation.

#### ENVIRONMENTAL HAZARDS

No significant hazards.

**NFPA Hazard ID:** Health: 0 Flammability: 1 Reactivity: 0

**HMIS Hazard ID:** Health: 0 Flammability: 1 Reactivity: 0

**NOTE:** This material should not be used for any other purpose than the intended use in Section 1 without expert advice. Health studies have shown that chemical exposure may cause potential human health risks which may vary from person to person.

### SECTION 3 COMPOSITION / INFORMATION ON INGREDIENTS

This material is defined as a mixture.

#### Reportable Hazardous Substance(s) or Complex Substance(s)

Name	CAS#	Concentration	GHS Hazard Codes
CARBONIC ACID, CALCIUM SALT (1:1)	471-34-1	5 - < 10%	None

\* All concentrations are percent by weight unless ingredient is a gas. Gas concentrations are in percent by volume.

As per paragraph (i) of 29 CFR 1910.1200, formulation is considered a trade secret and specific chemical identity and exact percentage (concentration) of composition may have been withheld. Specific chemical identity and exact percentage composition will be provided to health professionals, employees, or designated representatives in accordance with applicable provisions of paragraph (i).

Product Name: Mobil Polyrex EP 2

Revision Date: 25 Jul 2018

Page 2 of 7

**SECTION 4 FIRST AID MEASURES****INHALATION**

Under normal conditions of intended use, this material is not expected to be an inhalation hazard.

**SKIN CONTACT**

Wash contact areas with soap and water. If product is injected into or under the skin, or into any part of the body, regardless of the appearance of the wound or its size, the individual should be evaluated immediately by a physician as a surgical emergency. Even though initial symptoms from high pressure injection may be minimal or absent, early surgical treatment within the first few hours may significantly reduce the ultimate extent of injury.

**EYE CONTACT**

Flush thoroughly with water. If irritation occurs, get medical assistance.

**INGESTION**

First aid is normally not required. Seek medical attention if discomfort occurs.

**SECTION 5 FIRE FIGHTING MEASURES****EXTINGUISHING MEDIA**

**Appropriate Extinguishing Media:** Use water fog, foam, dry chemical or carbon dioxide (CO<sub>2</sub>) to extinguish flames.

**Inappropriate Extinguishing Media:** Straight streams of water

**FIRE FIGHTING**

**Fire Fighting Instructions:** Evacuate area. Prevent run-off from fire control or dilution from entering streams, sewers or drinking water supply. Fire-fighters should use standard protective equipment and in enclosed spaces, self-contained breathing apparatus (SCBA). Use water spray to cool fire exposed surfaces and to protect personnel.

**Hazardous Combustion Products:** Aldehydes, Incomplete combustion products, Oxides of carbon, Smoke, Fume, Sulphur oxides

**FLAMMABILITY PROPERTIES**

**Flash Point [Method]:** >168°C (334°F) [EST. FOR OIL, ASTM D-92 (COC)]

**Flammable Limits (Approximate volume % in air):** LEL: N/D UEL: N/D

**Autoignition Temperature:** N/A

**SECTION 6 ACCIDENTAL RELEASE MEASURES****NOTIFICATION PROCEDURES**

In the event of a spill or accidental release, notify relevant authorities in accordance with all applicable regulations. US regulations require reporting releases of this material to the environment which exceed the applicable reportable quantity or oil spills which could reach any waterway including intermittent dry creeks. The National Response Center can be reached at (800)424-8802.

**PROTECTIVE MEASURES**

Avoid contact with spilled material. See Section 5 for firefighting information. See the Hazard Identification Section for Significant Hazards. See Section 4 for First Aid Advice. See Section 8 for advice on the minimum requirements for personal protective equipment. Additional protective measures may be necessary, depending on the specific circumstances and/or the expert judgment of the emergency responders.

For emergency responders: Respiratory protection: respiratory protection will be necessary only in special cases, e.g., formation of mists. Half-face or full-face respirator with filter(s) for dust/organic vapor or Self Contained Breathing Apparatus (SCBA) can be used depending on the size of spill and potential level of exposure. If the exposure cannot be completely characterized or an oxygen deficient atmosphere is possible or anticipated, SCBA is recommended. Work gloves that are resistant to hydrocarbons are recommended. Gloves made of polyvinyl acetate (PVA) are not water-resistant and are not suitable for emergency use. Chemical goggles are recommended if splashes or contact with eyes is possible. Small spills: normal antistatic work clothes are usually adequate. Large spills: full body suit of chemical resistant, antistatic material is recommended.

**SPILL MANAGEMENT**

**Land Spill:** Stop leak if you can do so without risk. Recover by pumping or with suitable absorbent.



Product Name: Mobil Polyrex EP 2

Revision Date: 25 Jul 2018

Page 3 of 7



**Water Spill:** Stop leak if you can do so without risk. Confine the spill immediately with booms. Warn other shipping. Remove from the surface by skimming or with suitable absorbents. Seek the advice of a specialist before using dispersants.

Water spill and land spill recommendations are based on the most likely spill scenario for this material; however, geographic conditions, wind, temperature, (and in the case of a water spill) wave and current direction and speed may greatly influence the appropriate action to be taken. For this reason, local experts should be consulted. Note: Local regulations may prescribe or limit action to be taken.

#### ENVIRONMENTAL PRECAUTIONS

Prevent entry into waterways, sewers, basements, or confined areas.

### SECTION 7 HANDLING AND STORAGE

#### HANDLING

Prevent small spills and leakage to avoid slip hazard

**Static Accumulator:** This material is a static accumulator.

#### STORAGE

The type of container used to store the material may affect static accumulation and dissipation. Do not store in open or unlabelled containers. Keep away from incompatible materials.

Material is defined under the National Standard [NOHSC:1015] Storage and Handling of Workplace Dangerous Goods.

### SECTION 8 EXPOSURE CONTROLS / PERSONAL PROTECTION

#### EXPOSURE LIMIT VALUES

Exposure limits/standards (Note: Exposure limits are not additive)

Substance Name	Form	Limit/Standard			Note	Source
CARBONIC ACID, CALCIUM SALT (1:1)	Respirable fraction	TWA	5 mg/m <sup>3</sup>			OSHA Z1
CARBONIC ACID, CALCIUM SALT (1:1)	Total dust	TWA	15 mg/m <sup>3</sup>			OSHA Z1

Exposure limits/standards for materials that can be formed when handling this product:

NOTE: Limits/standards shown for guidance only. Follow applicable regulations.

#### Biological limits

No biological limits allocated.

#### ENGINEERING CONTROLS

The level of protection and types of controls necessary will vary depending upon potential exposure conditions.

Control measures to consider:

No special requirements under ordinary conditions of use and with adequate ventilation.

#### PERSONAL PROTECTION

Personal protective equipment selections vary based on potential exposure conditions such as applications, handling practices, concentration and ventilation. Information on the selection of protective equipment for use with this material, as provided below, is based upon intended, normal usage.

**Respiratory Protection:** If engineering controls do not maintain airborne contaminant concentrations at a level which is adequate to protect worker health, an approved respirator may be appropriate. Respirator selection, use, and maintenance must be in accordance with regulatory requirements, if applicable. Types of respirators to be considered for this material include:

No special requirements under ordinary conditions of use and with adequate ventilation.

For high airborne concentrations, use an approved supplied-air respirator, operated in positive pressure mode. Supplied air respirators with an escape bottle may be appropriate when oxygen levels are inadequate, gas/vapour warning properties are poor, or if air purifying filter capacity/rating may be exceeded.

Product Name: Mobil Polyrex EP 2

Revision Date: 25 Jul 2018

Page 4 of 7



**Hand Protection:** Any specific glove information provided is based on published literature and glove manufacturer data. Glove suitability and breakthrough time will differ depending on the specific use conditions. Contact the glove manufacturer for specific advice on glove selection and breakthrough times for your use conditions. Inspect and replace worn or damaged gloves. The types of gloves to be considered for this material include:

No protection is ordinarily required under normal conditions of use.

**Eye Protection:** If contact is likely, safety glasses with side shields are recommended.

**Skin and Body Protection:** Any specific clothing information provided is based on published literature or manufacturer data. The types of clothing to be considered for this material include:

No skin protection is ordinarily required under normal conditions of use. In accordance with good industrial hygiene practices, precautions should be taken to avoid skin contact.

**Specific Hygiene Measures:** Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants. Discard contaminated clothing and footwear that cannot be cleaned. Practise good housekeeping.

#### ENVIRONMENTAL CONTROLS

Comply with applicable environmental regulations limiting discharge to air, water and soil. Protect the environment by applying appropriate control measures to prevent or limit emissions.

### SECTION 9 PHYSICAL AND CHEMICAL PROPERTIES

**Note: Physical and chemical properties are provided for safety, health and environmental considerations only and may not fully represent product specifications. Contact the Supplier for additional information.**

#### GENERAL INFORMATION

**Physical State:** Solid  
**Form:** Semi-fluid  
**Colour:** Blue-Green  
**Odour:** Characteristic  
**Odour Threshold:** N/D

#### IMPORTANT HEALTH, SAFETY, AND ENVIRONMENTAL INFORMATION

<b>Relative Density (at 15 °C):</b>	0.9
<b>Flammability (Solid, Gas):</b>	N/A
<b>Flash Point [Method]:</b>	>168°C (334°F) [Est. for oil, ASTM D-92 (COC)]
<b>Flammable Limits (Approximate volume % in air):</b>	LEL: N/D UEL: N/D
<b>Autoignition Temperature:</b>	N/D
<b>Boiling Point / Range:</b>	> 330°C (626°F)
<b>Decomposition Temperature:</b>	N/D
<b>Vapour Density (Air = 1):</b>	N/D
<b>Vapour Pressure:</b>	< 0.013 kPa (0.1 mm Hg) at 20 °C
<b>Evaporation Rate (n-butyl acetate = 1):</b>	N/D
<b>pH:</b>	N/A
<b>Log Pow (n-Octanol/Water Partition Coefficient):</b>	> 3.5
<b>Solubility in Water:</b>	Negligible
<b>Viscosity:</b>	>211 cSt (211 mm <sup>2</sup> /sec) at 40 °C   >16.6 cSt (16.6 mm <sup>2</sup> /sec) at 100°C
<b>Oxidizing Properties:</b>	See Hazards Identification Section.

#### OTHER INFORMATION

**Freezing Point:** N/D  
**Melting Point:** 265°C (509°F)  
**DMSO Extract (mineral oil only), IP-346:** < 3 %wt

Note: Most physical properties above are for the oil component in the material

### SECTION 10 STABILITY AND REACTIVITY

**REACTIVITY:** See sub-sections below

**STABILITY:** Material is stable under normal conditions.

Product Name: Mobil Polyrex EP 2

Revision Date: 25 Jul 2018

Page 5 of 7

**CONDITIONS TO AVOID:** Excessive heat. High energy sources of ignition.**INCOMPATIBLE MATERIALS:** Strong oxidizers**HAZARDOUS DECOMPOSITION PRODUCTS:** Material does not decompose at ambient temperatures.**POSSIBILITY OF HAZARDOUS REACTIONS:** Hazardous polymerization will not occur.

<b>SECTION 11</b>	<b>TOXICOLOGICAL INFORMATION</b>
-------------------	----------------------------------

**INFORMATION ON TOXICOLOGICAL EFFECTS**

<b>Hazard Class</b>	<b>Conclusion / Remarks</b>
<b>Inhalation</b>	
Acute Toxicity: No end point data for material	Minimally Toxic. Based on assessment of the components
Irritation: No end point data for material	Negligible hazard at ambient/normal handling temperatures
<b>Ingestion</b>	
Acute Toxicity: No end point data for material	Minimally Toxic. Based on assessment of the components.
<b>Skin</b>	
Acute Toxicity: No end point data for material	Minimally Toxic. Based on assessment of the components
Skin Corrosion/Irritation: No end point data for material	Negligible irritation to skin at ambient temperatures. Based on assessment of the components
<b>Eye</b>	
Serious Eye Damage/Irritation: No end point data for material	May cause mild, short-lasting discomfort to eyes. Based on assessment of the components.
<b>Sensitization</b>	
Respiratory Sensitization: No end point data for material.	Not expected to be a respiratory sensitizer.
Skin Sensitization: No end point data for material.	Not expected to be a skin sensitizer. Based on assessment of the components.
<b>Aspiration:</b> Data available.	Not expected to be an aspiration hazard. Based on physicochemical properties of the material.
<b>Germ Cell Mutagenicity:</b> No end point data for material.	Not expected to be a germ cell mutagen. Based on assessment of the components.
<b>Carcinogenicity:</b> No end point data for material.	Not expected to cause cancer. Based on assessment of the components.
<b>Reproductive Toxicity:</b> No end point data for material.	Not expected to be a reproductive toxicant. Based on assessment of the components.
<b>Lactation:</b> No end point data for material.	Not expected to cause harm to breast-fed children.
<b>Specific Target Organ Toxicity (STOT)</b>	
Single Exposure: No end point data for material.	Not expected to cause organ damage from a single exposure.
Repeated Exposure: No end point data for material.	Not expected to cause organ damage from prolonged or repeated exposure. Based on assessment of the components.

**OTHER INFORMATION****For the product itself:**

Component concentrations in this formulation would not be expected to cause skin sensitization, based on tests of the components, this formulation, or similar formulations.

**Contains:**

Base oil severely refined: Not carcinogenic in animal studies. Representative material passes IP-346, Modified Ames test, and/or other screening tests. Dermal and inhalation studies showed minimal effects; lung non-specific infiltration of immune cells, oil deposition and minimal granuloma formation. Not sensitizing in test animals.

**IARC Classification:**

The following ingredients are cited on the lists below: None.

--REGULATORY LISTS SEARCHED--

1 = NTP CARC

3 = IARC 1

5 = IARC 2B

2 = NTP SUS

4 = IARC 2A

6 = OSHA CARC

Product Name: Mobil Polyrex EP 2

Revision Date: 25 Jul 2018

Page 6 of 7

**SECTION 12 ECOLOGICAL INFORMATION**

The information given is based on data for the material, components of the material, or for similar materials, through the application of bridging principals.

**ECOTOXICITY**

Material -- Not expected to be harmful to aquatic organisms.

**MOBILITY**

Base oil component -- Low solubility and floats and is expected to migrate from water to the land.  
Expected to partition to sediment and wastewater solids.

**PERSISTENCE AND DEGRADABILITY****Biodegradation:**

Base oil component -- Expected to be inherently biodegradable

**BIOACCUMULATION POTENTIAL**

Base oil component -- Has the potential to bioaccumulate, however metabolism or physical properties may reduce the bioconcentration or limit bioavailability.

**SECTION 13 DISPOSAL CONSIDERATIONS**

Disposal recommendations based on material as supplied. Disposal must be in accordance with current applicable laws and regulations, and material characteristics at time of disposal.

**DISPOSAL RECOMMENDATIONS**

Product is suitable for burning in an enclosed controlled burner for fuel value or disposal by supervised incineration at very high temperatures to prevent formation of undesirable combustion products.

**REGULATORY DISPOSAL INFORMATION**

RCRA Information: The unused product, in our opinion, is not specifically listed by the EPA as a hazardous waste (40 CFR, Part 261D), nor is it formulated to contain materials which are listed as hazardous wastes. It does not exhibit the hazardous characteristics of ignitability, corrosivity or reactivity and is not formulated with contaminants as determined by the Toxicity Characteristic Leaching Procedure (TCLP). However, used product may be regulated.

**Empty Container Warning** Empty Container Warning (where applicable): Empty containers may contain residue and can be dangerous. Do not attempt to refill or clean containers without proper instructions. Empty drums should be completely drained and safely stored until appropriately reconditioned or disposed. Empty containers should be taken for recycling, recovery, or disposal through suitably qualified or licensed contractor and in accordance with governmental regulations. DO NOT PRESSURISE, CUT, WELD, BRAZE, SOLDER, DRILL, GRIND, OR EXPOSE SUCH CONTAINERS TO HEAT, FLAME, SPARKS, STATIC ELECTRICITY, OR OTHER SOURCES OF IGNITION. THEY MAY EXPLODE AND CAUSE INJURY OR DEATH.

**SECTION 14 TRANSPORT INFORMATION**

**LAND (DOT):** Not Regulated for Land Transport

**LAND (ADG):** Not Regulated for Land Transport

**SEA (IMDG):** Not Regulated for Sea Transport according to IMDG-Code  
**Marine Pollutant:** No

**AIR (IATA):** Not Regulated for Air Transport

**SECTION 15 REGULATORY INFORMATION**

**OSHA HAZARD COMMUNICATION STANDARD:** This material is not considered hazardous in accordance with OSHA HazCom 2012, 29 CFR 1910.1200.

**Listed or exempt from listing/notification on the following chemical inventories:** IECSC, TCSI, TSCA

**SARA 302:** No chemicals in this material are subject to the reporting requirements of SARA Title III, Section 302

**SARA (311/312) REPORTABLE GHS HAZARD CLASSES:** None.

Product Name: Mobil Polyrex EP 2

Revision Date: 25 Jul 2018

Page 7 of 7

**ExxonMobil**

**SARA (313) TOXIC RELEASE INVENTORY:** This material contains no chemicals subject to the supplier notification requirements of the SARA 313 Toxic Release Program.

The following ingredients are cited on the lists below:

Chemical Name	CAS Number	List Citations
CARBONIC ACID, CALCIUM SALT (1:1)	471-34-1	4, 16, 17, 18
DIPHENYLAMINE	122-39-4	18
HYDROTREATED HEAVY NAPHTHENIC DISTILLATE	64742-52-5	13, 17, 18
NAPHTHALENE	91-20-3	10

--REGULATORY LISTS SEARCHED--

1 = ACGIH ALL	6 = TSCA 5a2	11 = CA P65 REPRO	16 = MN RTK
2 = ACGIH A1	7 = TSCA 5e	12 = CA RTK	17 = NJ RTK
3 = ACGIH A2	8 = TSCA 6	13 = IL RTK	18 = PA RTK
4 = OSHA Z	9 = TSCA 12b	14 = LA RTK	19 = RI RTK
5 = TSCA 4	10 = CA P65 CARC	15 = MI 293	

Code key: CARC=Carcinogen; REPRO=Reproductive

**SECTION 16 OTHER INFORMATION**



**WARNING:** Cancer - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

This warning is given to comply with California Health and Safety Code 25249.6 and does not constitute an admission or a waiver of rights.

N/D = Not determined, N/A = Not applicable

**THIS SAFETY DATA SHEET CONTAINS THE FOLLOWING REVISIONS:**

Section 12: information was modified.

Section 15: SARA (311/312) REPORTABLE GHS HAZARD CLASSES information was added.

Section 15: SARA (311/312) REPORTABLE HAZARD CATEGORIES information was deleted.

Section 16: Standard phrases for California Proposition 65 information was modified.

The information and recommendations contained herein are, to the best of ExxonMobil's knowledge and belief, accurate and reliable as of the date issued. You can contact ExxonMobil to ensure that this document is the most current available from ExxonMobil. The information and recommendations are offered for the user's consideration and examination. It is the user's responsibility to satisfy itself that the product is suitable for the intended use. If buyer repackages this product, it is the user's responsibility to ensure proper health, safety and other necessary information is included with and/or on the container. Appropriate warnings and safe-handling procedures should be provided to handlers and users. Alteration of this document is strictly prohibited. Except to the extent required by law, republication, or retransmission of this document, in whole or in part, is not permitted. The term, "ExxonMobil" is used for convenience, and may include any one or more of ExxonMobil Chemical Company, Exxon Mobil Corporation, or any affiliates in which they directly or indirectly hold any interest.

Internal Use Only

MHC: 0B, 0B, 0, 0, 0, 0

PPEC: A

DGN: 7053124DAU (1014681)

**End of (M)SDS**